


# California Life-Cycle **Benefit/Cost Analysis Model** (Cal-B/C) Version 4.1

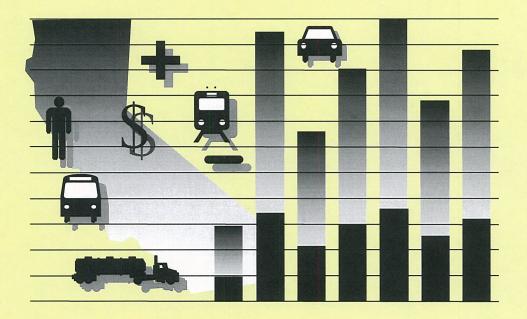

Office of Transportation Economics **Division of Transportation Planning** 

March 2010

For questions and comments, please contact:

Mahmoud Mahdavi Barry Padilla

(916) 653-9525 mahmoud mahdavi@dot.ca.gov

(916) 653-9248 barry\_padilla@dot.ca.gov

### INTRODUCTION

This spreadsheet model provides a method for preparing a simple economic analysis of both highway and transit projects. Given certain input data for a project, the model calculates its life-cycle costs, life-cycle benefits, net present value, benefit/cost ratio, internal rate of return, and payback period. Annual benefits are also calculated.

The model is arranged by worksheets and contains the following information, data, and results:

Worksheets	Contents
Instructions	General model description and
	assumptions
Project Information	Project input data
2) Model Inputs	Highway speed, volume, accident data,
	and trips estimated by model
3) Results	Summary results of analysis
Travel Time	Calculation of travel time and induced
	demand impacts
Vehicle Operating Costs	Calculation of highway vehicle operating
	cost impacts
Accident Costs	Calculation of accident cost impacts
Emissions	Calculation of emission impacts
Final Calculations	Calculation of net present value, internal
	rate of return, and payback period
Parameters	Economic assumptions, lookup tables,
	and other model parameters

The model is designed so that the user generally needs to enter data only in the green boxes on the Project Information worksheet. The model estimates detailed highway speed, volume, and accident data for the user to review on the Model Inputs worksheet. Highway speeds are estimated from volumes using relationships found in the Highway Capacity Manual. Other adjustments are made for weaving and pavement conditions. An option is also available to conduct a simple queuing analysis. Accidents are estimated from statewide averages and recent data for the facility. If available, inputs from regional planning or traffic simulation models can be entered to override model calculations. Summary results are shown in Results worksheet.

The remaining worksheets are provided for the user to see, but model performs calculations automatically. Some projects (i.e., bypasses, interchanges, and connectors) require the user to enter two sets of highway data, since two roads are involved. The model calculates benefits for the first road before the user enters information about the second road. The user clicks a button and the model clears the Project Information worksheet to receive information on the other road.

In the process of economic analysis, some generally accepted economic assumptions are necessary. These assumptions include: the real and nominal discount rates, unit user costs (e.g., value of time), consumption rates (e.g., fuel consumption and vehicle emissions), and accident rates. These assumptions are given in the Parameters worksheet and should not be changed by the user.

After reading the instructions in this worksheet, the user should proceed to the Project Information worksheet and input data for the specific project in the green boxes (light gray when printed). The model provides default values in the red boxes (medium gray when printed). These values can be changed by the user, if information specific to the project is available. The model calculates some values based on relationships or assumptions, with results shown in the blue boxes (dark gray when printed). These values can be changed by the user.

### **INSTRUCTIONS**

The user can analyze most projects simply by entering limited data on the Project Information Sheet and getting results on the Results page. The Model Inputs page allows the user to enter more detailed data adjust estimated speeds, volumes, and accidents rates, and check the number of trips estimated for projects that affect vehicle occupancy.

## PROJECT DATA (Box 1A)

This section provides general information about the project and is used for highway, rail, and transit projects. At the top of the sheet, the user can enter information about the project, such as the project name, Caltrans district, and funding information.

## Type of Project

1 Please select the appropriate type of highway, rail, or transit project from the pull-down menu. The menu appears if user clicks on the green box next to the project type.

For a bypass or intersection project, model reminds user that information must be entered for both roads impacted by project. After entering information for the first road, the user clicks a button at bottom of the worksheet to prepare model for data on the bypass or intersecting road. The user may also enter information for connector projects involving two roads.

#### **Project Location**

2 Insert a 1, 2, or 3 for the appropriate region of California. This information is used to estimate peak traffic and emissions benefits.

#### Length of Construction Period

3 Insert the number of construction years before benefits begin. This must be a whole number (round to next higher integer).

### One- or Two-Way Data

4 Indicate whether Highway Design and Traffic Data to be entered in Box 1B is for a single direction or both directions of highway.

## Length of Peak Period(s)

5 Insert the number of peak period hours per typical day. The model provides a default of 5 hours (statewide average). Model estimates total % daily traffic occurring during peak period using a lookup table developed from Traffic Census data. Model does not distinguish between weekdays and weekends.

To model a 24-hour HOV or HOT lane, enter 24 hours so peak is 100% of ADT. To model a ramp metering project, user should enter the number of hours per day that metering is operational.

## **HIGHWAY DESIGN AND TRAFFIC DATA (Box 1B)**

Highway design and traffic data must be entered for highway projects. Enter data consistent with one- or two-way answer in Box 1A. Statewide default values are provided for some inputs.

### Highway Design

- 6 Roadway Type: Indicate if the road is a freeway, expressway, or conventional highway in build and no build cases.
- 7 Number of General Traffic Lanes: Insert number of general purpose (not HOV or bus) lanes in both directions for build and no build cases. Enter data consistent with Box 1A.
- 8 Number of HOV Lanes: Insert number of HOV lanes in both directions for the build and no build cases. A value must be provided if an HOV restriction is entered on the next row.
- 9 HOV Restriction: If highway facility has/will have HOV lanes, enter the HOV restriction (e.g., 2 means 2 people per vehicle). Must be entered for an HOV project. Enter for a non-HOV project, if facility has HOV lanes. Changes in HOV restrictions are special project types and handled automatically by model.
- 10 Exclusive ROW for Buses: If bus project, indicate (with "Y" or "N") whether buses have exclusive right-of-way. This information is used to estimate emissions.
- 11 **Highway Free-Flow Speed:** Insert free-flow speed for build and no build cases. Model assumes build is same as no build, if not entered.
- **12 Ramp Design Speed:** If auxiliary lane or off-ramp project, enter the design speed of the appropriate on- or off-ramp. This is used to estimate the speed of traffic affected by weaving.
- **13 Highway Segment:** Insert segment length for build and no build cases. Model assumes build is same as no build, if not entered.
- 14 Impacted Length: The model estimates an area affected by the project. In most cases, this equals the segment length. For passing lane projects, the default affected area is 3 miles longer than the project area. For auxiliary lane and off-ramp projects, the default affected area is 1500 feet. For connectors and HOV drop ramps, default affected area is 3250 feet. User can change these lengths.

## Average Daily Traffic (ADT)

- 15 Current: For most projects, insert current two-way ADT on facility. For operational improvements, enter only the one-way ADT applicable to the project. Enter data consistent with one-way or two-way answer in Box 1A.
- **16 Forecast (Year 20):** Insert projected ADT for 20 years after construction completion for build and no build cases. Model assumes build is same as no build, if not entered.

The model uses the current and forecasted ADT to estimate annual traffic for 20 years after construction, assuming a linear trend. User can change base (Year 1) forecasts.

#### Average Hourly HOV/HOT Lane Traffic

17 Insert hourly HOV/HOT volumes for build and no build cases in a typical peak hour.

#### Percent Traffic in Weave

18 For operational improvements, insert % traffic affected by weaving. Model suggests a % based on the type of project (2 right lanes for auxiliary lanes, 3 right lanes for off-ramps, 2.5% of all traffic for freeway connectors, and 4% of HOV traffic for HOV connectors and drop ramps). Users can change values for project conditions.

#### Percent Trucks

19 Insert estimated % of ADT comprised of trucks in build and no build cases. Model provides a default value (statewide average).

#### Truck Speed

20 If passing lane project, enter estimated speed (in MPH) for slow vehicles (trucks, recreational vehicles, etc.). Values must be entered for passing lane projects.

## On-Ramp Volume

- 21 **Hourly Ramp Volume:** If auxiliary lane or on-ramp widening project, insert average hourly ramp volume to estimate traffic affected by weaving for auxiliary lanes and metering effectiveness for on-ramp widening. No entry needed for ramp metering projects.
- 22 **Metering Strategy:** If on-ramp widening project, enter 1, 2, or 3 for vehicles allowed per green signal. Enter "D" for dual metering. No entry should be made for ramp metering projects.

#### **Queue Formation**

- 23 Arrival Rate: For queuing and rail grade crossing projects, enter vehicles per hour contributing to queue. Arrival rate should be estimated only for time queue grows. Model estimates queue dissipation automatically.
- **24 Departure Rate:** For queuing and rail crossing projects, enter vehicles per hour leaving queue.

#### Pavement Condition (for Pavement Rehab. Projects)

25 If pavement rehabilitation project, enter base (Year 1) International Roughness Index (IRI) for build and no build. Model will calculate Year 20 values using standard parameters unless entered by user.

#### Average Vehicle Occupancy (AVO)

26 Model provides default values. The figures change automatically, depending on presence of HOV lanes. Adjust if project-specific data are available.

### **HIGHWAY ACCIDENT DATA** (Box 1C)

Statewide default values are provided for transit projects. The model uses information provided to calculate accident rates for each accident type in the Model Inputs worksheet.

#### Actual 3-Year Accident Data (from Table B)

27 Insert the total number of fatal, injury, and property damage only accidents on the segment over the 3 most recent years. For rail grade crossing projects, enter 10-year accident data from FRA WBAPS in fatal and injury rows and collision prediction in total accident row.

## Statewide Basic Average Accident Rate

- 28 Insert statewide average accident rates per million vehicle-miles (or million vehicles, as appropriate) for build and no build highway rate groups. Include Base Rate and ADT Factor where applicable.
- 29 Insert statewide % of accidents that are fatal and injury accidents for road classifications similar to build and no build facilities.

The model uses adjustment factors (the ratio of actual rates to statewide rates for existing facility) to estimate accident rates by accident type for the new road classification. Additional adjustments (accident savings) are made for highway TMS projects. Results are presented in the Model Inputs worksheet and can be changed by the user.

## **RAIL AND TRANSIT DATA (Box 1D)**

This section is used for rail and transit projects only.

### Annual Person-Trips

- 30 Base (Year 1): Insert estimated annual transit person-trips for first year after construction completion in build and no build cases. For a transit TMS project, enter only person-trips on routes affected. If the routes are substantially different, the benefits analysis should be split into pieces.
- 31 Forecast (Year 20): Insert forecasted annual transit persontrips for 20 years after construction completion in build and no build cases.

#### Percent Trips during Peak Period

32 Insert % annual person-trips that occur during peak period.

## Percent New Trips from Parallel Highway

33 Insert % new transit person-trips originating on parallel highway.

#### Annual Vehicle-Miles

- 34 Base (Year 1): Insert estimated annual vehicle-miles for first year after construction completion in build and no build cases. For passenger rail projects, multiply the number of train-miles by the average number of rail cars per train consist.
- 35 Forecast (Year 20): Insert forecasted annual vehicle-miles for 20 years after construction completion in build and no build cases.

## Average Vehicles per Train

**36** If passenger rail project, insert the average number of rail cars per train consist. This is used to calculate emissions.

#### Reduction in Transit Accidents

37 If project affects transit/rail safety, insert estimated percent accident reduction due to project. Increases should be entered as negative %.

## Average Transit Travel Time

38 In-Vehicle: Insert average in-vehicle transit travel time in minutes during peak and non-peak periods in build and no build cases. For TMS Projects, insert the average for all transit routes impacted. Model assumes build is same as no build for most

- projects. Signal priority and bus rapid transit projects reduce time. User can adjust build travel times.
- 39 Out-of-Vehicle: Insert average out-of-vehicle transit travel time in minutes during peak and non-peak periods. Model monetizes out-of-vehicle travel time at a higher value.

### Highway Grade Crossing

- **40 Annual Number of Trains:** Insert annual number of passenger and freight trains entering highway-rail crossing.
- **41 Average Gate Down Time:** Insert average time per train that crossing gate is down for passenger and freight trains.

### Transit Agency Costs (for Transit TMS Projects)

- 42 Annual Capital Expenditure: If transit TMS project, insert annual agency capital expenditures for routes impacted by project. Model calculates cost reductions for expenditures in build case due to transit TMS. Agency cost savings are entered automatically as a negative cost in Box 1E.
- 43 Annual Ops. and Maintenance Expenditure: If transit TMS project, insert the annual average operating and maintenance costs for routes impacted by project. Model calculates cost reductions for expenditures in build case due to transit TMS. Agency cost savings are entered automatically as a negative cost in Box 1E.

## **PROJECT COSTS** (Box 1E)

Net project costs should be entered in the years they are expected to occur. Costs should be entered for construction period and for twenty years after construction completion. Construction Year 1 is the first year that costs are incurred. All costs should be entered in thousands of dollars.

- 44 Insert project's initial costs in constant (Year 2007) dollars for project development, right-of-way, and construction. The number of construction years with costs should equal the length of the construction period (Box 1A, Input 5).
- 45 Insert estimated future incremental maintenance/operating and rehabilitation costs in constant (Year 2007) dollars. These figures should be entered in the years after the project opens.

- 46 Insert estimated mitigation costs (e.g., wetlands, community, and sound walls) in constant (Year 2007) dollars during construction and for 20 years after construction completion.
- 47 Model adds agency cost savings due to transit TMS automatically.
- 48 Insert any other costs not already included.

## **HIGHWAY SPEED AND VOLUME INPUTS (Box 2A)**

This section allows user to review detailed speed and volume data estimated by the model. These values are estimated from the inputs provided in the Project Information sheet.

- 49 User may enter new speed and volume data for the highway in the green boxes to override model calculations, if detailed data are available from a travel demand or micro-simulation model. The model estimates speeds and volumes on highway for HOVs, non-HOVs, weaving vehicles, and trucks during the peak and non-peak periods in Year 1 and Year 20 in build and no build cases. Speeds are estimated using a BPR curve (or queuing analysis). Adjustments are made to speed and volumes to account for weaving, transit mode shifts, pavement condition, and TMS.
- 50 If TMS project and detailed simulation data are available, the highway results should be inputted in the green cells. Model will use the data in place of figures estimated by the model.

## **HIGHWAY ACCIDENT RATES** (Box 2B)

User may adjust accident rates calculated by the model. User may also enter TASAS highway accident data for rail grade crossing projects in this box.

- 51 **No Build:** Fatality, injury and PDO accident rates for no build facility are estimated using inputs from Box 1C of the Project Information sheet. User may change these rates in green boxes.
- 52 **Highway Safety or Weaving Improvement:** Model assumes an overall safety improvement for off-ramp and ramp metering projects. User may adjust this percentage. For safety projects, user should enter collision reduction factor from HSIP Guidelines.
- 53 Adjustment Factor: User may change the ratios of facility accident rates to statewide averages used in calculating rates

- for the build facility. These factors are also adjusted by the collision reduction factor.
- 54 **Build Facility:** User may modify the fatality, injury, and PDO accident rates for build facility. Model estimates these accident rates using statewide average rates and the adjustment factors.

### **RAMP AND ARTERIAL INPUTS (Box 2C)**

This section allows users to enter detailed arterial information for an arterial signal management project or detailed ramp and arterial data for a highway TMS project.

- 55 Detailed Information Available: Input "Y" if detailed arterial and/or ramp data are available. Model automatically selects "Y" if other data are inputted. User should enter detailed ramp and arterial data for TMS highway project if detailed highway data are entered in Box 2A.
- 56 Aggregate Segment Length: Input the total segment lengths for the ramps and arterials. These can be estimated from travel demand or micro-simulation model data as VMT/total trips.
- 57 User may enter speeds and volumes on ramps and arterials during peak and non-peak periods in Year 1 and Year 20 in build and no build cases. If arterial signal management project, user must enter arterial data. Benefits are estimated assuming all vehicles are automobiles.

## ANNUAL PERSON-TRIPS (Box 2D)

This section is for information purposes only. It allows user to examine number trips estimated for projects that affect AVO (e.g., HOT lane and HOV conversions).

## **NEXT STEPS**

- 58 For bypass, interchange, and connector projects, click button on Project Information page after data are verified for the first road. Enter data for the second road in Boxes 1B and 1C. As with the first road, detailed data may be verified on Model Inputs page. Model prompts user to save interim version of analysis before proceeding.
- 59 Summary results are available immediately in the Results worksheet.

is		

10

PROJECT:

STAN-Kiernan Interchange @ SR-99

EA:	to the second
PPNO:	

1A PROJECT DATA						
Type of Project						
Select project type from list	General Highway					
Project Location (enter 1 for So. Cal., 2 for No.	o. Cal., or 3 for rural)					
Length of Construction Period	2 years					
One- or Two-Way Data	2 enter 1 or 2					
Length of Peak Period(s) (up to 24 hrs						

1B HIGHWAY DESIGN AND TRAF	FIC DAT	A
Highway Design	No Build	Build
Roadway Type (Fwy, Exp, Conv Hwy)	С	E
Number of General Traffic Lanes	4	8
Number of HOV/HOT Lanes		
HOV Restriction (2 or 3)		
Exclusive ROW for Buses (y/n)	N	
Highway Free-Flow Speed	30	30
Ramp Design Speed (if aux. lane/off-ramp proj.)	35	35
Length (in miles) Highway Segment	1.0	1.0
Impacted Length	1.0	1.0
Average Daily Traffic		
Current	21,000	
	No Build	Build
Base (Year 1)	23.590	23,590
Forecast (Year 20)	48,200	48,200
Average Hourly HOV/HOT Lane Traffic		0
Percent of Induced Trips in HOV (if HOT or 2-to-3	conv.)	100%
Percent Traffic in Weave		0.0%
Percent Trucks (include RVs, if applicable)	14%	14%
Truck Speed		
On-Ramp Volume	Peak	Non-Peak
Hourly Ramp Volume (if aux. lane/on-ramp proj.)	0	0
Metering Strategy (1, 2, 3, or D, if on-ramp proj.)		
Outputs Formation (if available as and available)	Year 1	Year 20
Queue Formation (if queuing or grade crossing project)  Arrival Rate (in vehicles per hour)	0	0
Departure Rate (in vehicles per hour)	0	0
Departure Rate (iii verlicles per riour)	U	U
Pavement Condition (if pavement project)	No Build	Build
IRI (inches/mile) Base (Year 1)		
Forecast (Year 20)		
Average Vehicle Occupancy (AVO)	No Build	Build
General Traffic Non-Peak	1.30	1.30
	1.15	1.15
Peak		

1C HIGHWAY ACCIDENT DATA							
Actual 3-Year Accident Data (from Table B)							
	Count (No.)	Rate					
Total Accidents (Tot)		0.97					
Fatal Accidents (Fat)	1	0.043					
Injury Accidents (Inj)	3	0.13					
Property Damage Only (PDO) Accidents	20	0.87					
Statewide Basic Average Accident Rate	No Build	Build					
Rate Group							
Accident Rate (per million vehicle-miles)	1.30	1.15					
Descent Fetal Assidents (Det Fet)	3.1%	1.0%					
Percent Fatal Accidents (Pct Fat)	39.0%	37.8%					

Daniel Danies T			
חחומו Person-Ti		No Build	Build
	Base (Year 1) Forecast (Year 20)		
ercent Trips dur	34%	3-14-35-35-36-36-36-36-36-36-36-36-36-36-36-36-36-	
	s from Parallel Highway	3470	100%
ercent New Trip	s Irom Faranei riigiiway		10076
nnual Vehicle-M	liles	No Build	Build
	Base (Year 1)		
	Forecast (Year 20)		
verage Vehicles	/Train (if rail project)	CARAGE RELEASE	
	on (if safety project)		
Percent Reducti	on (if safety project)	No Build	Build
Percent Reducti	on (if safety project)	No Build	Build 0.0
Percent Reducti	on (if safety project)  Fravel Time	No Build	
Percent Reducti	on (if safety project)  Fravel Time  Non-Peak (in minutes)  Peak (in minutes)	No Build	0.0
Percent Reducti  Verage Transit 1  In-Vehicle	on (if safety project)  Fravel Time  Non-Peak (in minutes)  Peak (in minutes)		0.0
Percent Reducti  Verage Transit 1 In-Vehicle  Out-of-Vehicle	on (if safety project)  Fravel Time  Non-Peak (in minutes)  Peak (in minutes)  Non-Peak (in minutes)  Peak (in minutes)	0.0	0.0 0.0 0.0 0.0
Percent Reducti Verage Transit 1 In-Vehicle Out-of-Vehicle Lighway Grade C	Fravel Time Non-Peak (in minutes) Peak (in minutes) Non-Peak (in minutes) Peak (in minutes) Peak (in minutes) Peak (in minutes) Courrent	0.0 0.0 Year 1	0.0 0.0 0.0
Percent Reducti Verage Transit T In-Vehicle Out-of-Vehicle Lighway Grade C Annual Number	Travel Time Non-Peak (in minutes) Peak (in minutes) Non-Peak (in minutes) Peak (in minutes) Peak (in minutes) Crossing Current of Trains	0.0 0.0 Year 1	0.0 0.0 0.0 0.0
Percent Reducti Verage Transit 1 In-Vehicle Out-of-Vehicle Lighway Grade C	Travel Time Non-Peak (in minutes) Peak (in minutes) Non-Peak (in minutes) Peak (in minutes) Peak (in minutes) Crossing Current of Trains	0.0 0.0 Year 1	0.0 0.0 0.0 0.0
Percent Reducti  Verage Transit 1 In-Vehicle  Out-of-Vehicle  Lighway Grade C Annual Number Avg. Gate Down	on (if safety project)  Fravel Time Non-Peak (in minutes) Peak (in minutes) Peak (in minutes) Peak (in minutes) Peak (in minutes)  Frossing Of Trains Time (in min.)	0.0 0.0 Year 1	0.0 0.0 0.0 0.0
Percent Reducti  Average Transit 1 In-Vehicle  Out-of-Vehicle  Aighway Grade C Annual Number Avg. Gate Down	on (if safety project)  Fravel Time Non-Peak (in minutes) Peak (in minutes) Peak (in minutes) Peak (in minutes)  Frossing Of Trains Time (in min.)  Costs (if TMS project)	0.0 0.0 Year 1 0	0.0 0.0 0.0 0.0 Year 20

Model should be run for both roads for intersection or bypass highway projects, and may be run twice for connectors. Press button below to prepare model to enter data for second road. After data are entered, results reflect total project benefits.

Prepare Model for Second Road

Enter all project costs (in today's dollars) in columns 1 to 7. Costs during construction should be entered in the first eight rows. Project costs (including maintenance and operating costs) should be net of costs without project.

Col. no.									
	(1)	(2)	(3)	(4)	(5)	(6)	(7)		
			CT PROJECT COS				Transit		
		NITIAL COST	S		ENT COSTS		Agency	TOTAL COSTS	
Year	Project Support	R/W	Construction	Maint./ Op.	Rehab.	Mitigation	Cost Savings	Constant Dollars	Present Value
onstructio									
1	\$14,900		\$25,500					\$40,400,000	\$40,400,00
2			25,500					25,500,000	24,519,23
3								0	
4								0	
5								0	
6								0	
7	CARCANE LA SELLA CA							0	
8								0	
roject Ope	n								
1								\$0	\$
2								0	
3								0	
4								0	
5			2					0	
6								0	
7								0	
8								0	
9								0	
10								0	
12								0	
13								0	
14								0	
15								0	
16								0	
17				NAME OF THE OWNER, OF THE OWNER, OF THE OWNER, OF THE OWNER, OWNER, OWNER, OWNER, OWNER, OWNER, OWNER, OWNER,				0	
18								0	
19								0	
20								0	


Present Value = <u>Future Value (in Constant Dollars)</u>
(1 + Real Discount Rate) ^ Year

A	HIGHW	AY SPEED	AND VOLUME	INPUTS
	Calculated by Model	Changed by User	Used for Proj. Eval.	Reason for Change
ild	Model	by User	Eval.	Reason for Change
ear 1 Peak Period				
HOV Volume	0		0	
Non-HOV Volume Weaving Volume	6,918		6,918	
Truck Volume	1,126		1,126	
HOV Speed	55.0		55.0	
Non-HOV Speed Weaving Speed	30.0 55.0		30.0 55.0	
Truck Speed	30.0		30.0	
Non-Peak Period				
Non-HOV Volume	13,370		13,370	
Weaving Volume Truck Volume	2,176		2,176	
Non-HOV Speed	30.0		30.0	
Weaving Speed Truck Speed	55.0 30.0		55.0 30.0	
	30.0		30.0	
ar 20 Peak Period				
HOV Volume	0		0	* r-w-i-wa
Non-HOV Volume Weaving Volume	14,135		14,135	
Truck Volume	2,301		2,301	
HOV Speed	55.0		55.0	
Non-HOV Speed Weaving Speed	18.6 55.0		18.6 55.0	A STATE OF THE STA
Truck Speed	18.6		18.6	
Non-Peak Period Non-HOV Volume	27,317		27,317	
Weaving Volume	0		0	
Truck Volume	4,447		4,447	
Non-HOV Speed Weaving Speed	30 0 55.0		30 0 55.0	
Truck Speed	30.0		30.0	
ear 1				
Peak Period HOV Volume	0		0	
Non-HOV Volume	6,918		6,918	
Weaving Volume Truck Volume	1,126		1,126	
HOV Speed	55.0		55.0	
Non-HOV Speed	30.0		30.0	
Weaving Speed Truck Speed	55.0 30.0		55.0 30.0	
	30.0		30.0	
Non-Peak Period Non-HOV Volume	13,370		13,370	
Weaving Volume	0		0	
Truck Volume	2,176		2,176	
Non-HOV Speed Weaving Speed	30.0 55.0		30.0 55.0	
Truck Speed	30.0		30.0	
nr 20				
Peak Period				,
HOV Volume Non-HOV Volume	14,135		14,135	
	0		0	
Weaving Volume	2,301		2,301	
Truck Volume	EE O		55.0 30.0	
Truck Volume HOV Speed	55.0		55.0	
Truck Volume	30.0 55.0			
Truck Volume HOV Speed Non-HOV Speed	30.0		30.0	
Truck Volume HOV Speed Non-HOV Speed Weaving Speed Truck Speed	30.0 55.0 30.0			
Truck Volume HOV Speed Non-HOV Speed Weaving Speed Truck Speed  Non-Peak Period Non-HOV Volume	30.0 55.0 30.0		27,317	
Truck Volume HOV Speed Non-HOV Speed Weaving Speed Truck Speed	30.0 55.0 30.0			
Truck Volume HOV Speed Non-HOV Speed Weaving Speed Truck Speed Non-Peak Period Non-HOV Volume Weaving Volume Truck Volume Non-HOV Speed	30.0 55.0 30.0 27,317 0 4,447 30.0		27,317 0 4,447 30.0	
Truck Volume HOV Speed Non-HOV Speed Weaving Speed Truck Speed  Non-Peak Period Non-HOV Volume Weaving Volume Truck Volume	30.0 55.0 30.0 27,317 0 4,447		27,317 0 4,447	

Model speed estimates based on Highway Capacity Manual, pavement research, and research on weaving impacts

2B	HIGHWAY ACCIDENT RATES						
	Calculated by Model	Changed by User	Used for Proj. Eval.	Reason for Change			
No Build							
Fatal Accidents	0.043		0.043				
Injury Accidents	0.13		0.13				
PDO Accidents	0.87		0.87				
Total Accidents  Hwy Safety or Weaving Impr		0%	collision reduction	factor (per HSIP Guidelines)			
	rovement tatewide Avg. Existing)	0%		factor (per HSIP Guidelines)			
Hwy Safety or Weaving Impr Adjustment Factor (Actual/St Fatal Accidents	tatewide Avg. Existing)	0%	1.0670	factor (per HSIP Guidelines)			
Hwy Safety or Weaving Impr	rovement tatewide Avg. Existing)	0%		factor (per HSIP Guidelines)			
Hwy Safety or Weaving Impr Adjustment Factor (Actual/St Fatal Accidents Injury Accidents	tatewide Avg. Existing)  1.0670 0.2564	0%	1.0670 0.2564	factor (per HSIP Guidelines)			
Hwy Safety or Weaving Impr Adjustment Factor (Actual/St Fatal Accidents Injury Accidents PDO Accidents	tatewide Avg. Existing)  1.0670 0.2564	0%	1.0670 0.2564	factor (per HSIP Guidelines)			
Hwy Safety or Weaving Impa Adjustment Factor (Actual/St Fatal Accidents Injury Accidents PDO Accidents	rovement	0%	1.0670 0.2564 1.1558	factor (per HSIP Guidelines)			
Adjustment Factor (Actual/SI Fatal Accidents Injury Accidents PDO Accidents Build Fatal Accidents	rovement	0%	1.0670 0.2564 1.1558	factor (per HSIP Guidelines)			

2C (if detailed infor	RAMP AND AI		UTS gnal management project)
In asiansa man	materi is available for a f	THO OF AIT AITONAL OF	
Detailed Information Available? (y/n)	N		
Aggregate Segment Length (estimate as VMT/t	total volume)		
All Ramps	total volume)	miles	
Arterials		miles	
	Entered	Used for	
	by User	Proj. Eval.	Source/Notes
lo Build (Peak Period Only) Year 1			
Aggregate Ramp Volume		0	
Aggregate Arterial Volume		0	
Average Ramp Speed		5.0	
Average Arterial Speed		5.0	
, trotago , trotal opocu		0.0	
Year 20			
Aggregate Ramp Volume		0	
Aggregate Arterial Volume		0	
Average Ramp Speed		5.0	
Average Arterial Speed		5.0	
Build (Peak Period Only)			
Year 1			
Aggregate Ramp Volume Aggregate Arterial Volume		0	
Average Ramp Speed		5.0	
Average Arterial Speed		5.0	
Average Arterial Speed		3.0	
Year 20			
Aggregate Ramp Volume		0	
Aggregate Arterial Volume		0	
Average Ramp Speed		5.0	
Average Arterial Speed		5.0	

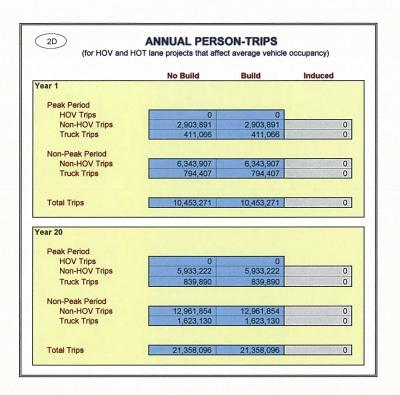

District:

10

PROJECT: STAN-Kiernan Interchange @ SR-99

EA:	TRANSPERMENT
PPNO:	

## 3

## **INVESTMENT ANALYSIS**

**SUMMARY RESULTS** 

Life-Cycle Costs (mil. \$)	\$64.9
Life-Cycle Benefits (mil. \$)	\$63.2
Net Present Value (mil. \$)	-\$1.7
Benefit / Cost Ratio:	1.0
Rate of Return on Investment:	3.8%
Payback Period:	16 years

	Average	Total Over
ITEMIZED BENEFITS (mil. \$)	Annual	20 Years
Travel Time Savings	\$0.6	\$11.4
Veh. Op. Cost Savings	\$0.3	\$5.8
Accident Cost Savings	\$2.2	\$44.9
<b>Emission Cost Savings</b>	\$0.1	\$1.1
TOTAL BENEFITS	\$3.2	\$63.2
Person-Hours of Time Saved	46,308	926,160
Additional CO <sub>2</sub> Emissions (tons)	-1,895	-37,909
Additional CO <sub>2</sub> Emissions (mil. \$)	-\$0.0	-\$1.0

## Should benefit-cost results include:

- 1) Induced Travel? (y/n)
- 2) Vehicle Operating Costs? (y/n)
- 3) Accident Costs? (y/n)
- 4) Vehicle Emissions? (y/n) includes value for CO<sub>2</sub>e



Default = Y

Default = Y

Default = Y

Default = Y

## **SUMMARY OF TRAVEL TIME BENEFITS**

					HIGHWAY				
Year	Peak HOV	Peak Non-HOV	Peak Weaving	Peak Truck	Peak Ramp	Peak Arterial	Non-Peak Non-HOV	Non-Peak Weaving	Non-Peak Truck
1	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
20	\$0	\$617,048	\$0	\$216,110	\$0	\$0	\$0	\$0	\$0
2	\$0	\$21,490	\$0	\$7,526	\$0	\$0	\$0	\$0	\$0
3	\$0	\$44,383	\$0	\$15,545	\$0	\$0	\$0	\$0	\$0
4	\$0	\$68,611	\$0	\$24,030	\$0	\$0	\$0	\$0	\$0
5	\$0	\$94,112	\$0	\$32,961	\$0	\$0	\$0	\$0	\$0
6	\$0	\$120,834	\$0	\$42,320	\$0	\$0	\$0	\$0	\$0
7	\$0	\$148,735	\$0	\$52,092	\$0	\$0	\$0	\$0	\$0
8	\$0	\$177,782	\$0	\$62,265	\$0	\$0	\$0	\$0	\$0
9	\$0	\$207,949	\$0	\$72,831	\$0	\$0	\$0	\$0	\$0
10	\$0	\$239,222	\$0	\$83,783	\$0	\$0	\$0	\$0	\$0
11	\$0	\$271,596	\$0	\$95,121	\$0	\$0	\$0	\$0	\$0
12	\$0	\$305,073	\$0	\$106,846	\$0	\$0	\$0	\$0	\$0
13	\$0	\$339,671	\$0	\$118,963	\$0	\$0	\$0	\$0	\$0
14	\$0	\$375,414	\$0	\$131,482	\$0	\$0	\$0	\$0	\$0
15	\$0	\$412,341	\$0	\$144,415	\$0	\$0	\$0	\$0	\$0
16	\$0	\$450,503	\$0	\$157,780	\$0	\$0	\$0	\$0	\$0
17	\$0	\$489,965	\$0	\$171,601	\$0	\$0	\$0	\$0	\$0
18	\$0	\$530,808	\$0	\$185,906	\$0	\$0	\$0	\$0	\$0
19	\$0	\$573,130	\$0	\$200,728	\$0	\$0	\$0	\$0	\$0
Total	\$0	\$5,488,667	\$0	\$1,922,306	\$0	\$0	\$0	\$0	\$0

## C

## **SUMMARY OF TRAVEL TIME BENEFITS (continued)**

		TRAN	ISIT		Present Value of		Total
Year	Peak In-Vehicle	Peak Out-of-Veh	Non-Peak In-Vehicle	Non-Peak Out-of-Veh	Travel Time Benefits	Constant Dollars	Per-Hrs of Time Saved
1	\$0	\$0	\$0	\$0	\$0	\$0	C
20	\$0	\$0	\$0	\$0	\$833,158	\$1,898,574	138,375
2	\$0	\$0	\$0	\$0	\$29,016	\$32,639	2,379
3	\$0	\$0	\$0	\$0	\$59,928	\$70,107	5,110
4	\$0	\$0	\$0	\$0	\$92,641	\$112,712	8,215
5	\$0	\$0	\$0	\$0	\$127,073	\$160,787	11,719
6	\$0	\$0	\$0	\$0	\$163,154	\$214,700	15,648
7	\$0	\$0	\$0	\$0	\$200,827	\$274,846	20,032
8	\$0	\$0	\$0	\$0	\$240,047	\$341,662	24,902
9	\$0	\$0	\$0	\$0	\$280,780	\$415,623	30,292
10	\$0	\$0	\$0	\$0	\$323,006	\$497,253	36,242
11	\$0	\$0	\$0	\$0	\$366,717	\$587,126	42,792
12	\$0	\$0	\$0	\$0	\$411,920	\$685,877	49,989
13	\$0	\$0	\$0	\$0	\$458,634	\$794,206	57,885
14	\$0	\$0	\$0	\$0	\$506,896	\$912,890	66,535
15	\$0	\$0	\$0	\$0	\$556,756	\$1,042,793	76,003
16	\$0	\$0	\$0	\$0	\$608,283	\$1,184,875	86,358
17	\$0	\$0	\$0	\$0	\$661,566	\$1,340,212	97,680
18	\$0	\$0	\$0	\$0	\$716,714	\$1,510,008	110,055
19	\$0	\$0	\$0	\$0	\$773,858	\$1,695,618	123,583
Total	\$0	\$0	\$0	\$0	\$7,410,974	\$13,772,508	1,003,793

## **SUMMARY OF VEHICLE OPERATING COST BENEFITS**

				HIGH	WAY				TRA	ANSIT	Present Value of	
Year	Peak	Peak	Peak	Peak	Peak	Non-Peak	Non-Peak	Non-Peak	Peak	Non-Peak	Veh Op Cost	Constant
	HOV	Non-HOV	Weaving	Truck	Arterial	Non-HOV	Weaving	Truck	Period	Period	Benefits	Dollars
1	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0		Latino 5- No. 15	\$0	\$0
20	\$0	\$185,293	\$0	\$53,544	\$0	\$0	\$0	\$0		-	\$238,837	\$544,254
2	\$0	\$11,746	\$0	\$2,756	\$0	\$0	\$0	\$0	-		\$14,502	\$16,313
3	\$0	\$23,763	\$0	\$5,577	\$0	\$0	\$0	\$0	- L	-	\$29,340	\$34,324
4	\$0	\$23,980	\$0	\$5,627	\$0	\$0	\$0	\$0		formula - problem	\$29,607	\$36,022
5	\$0	\$35,462	\$0	\$8,370	\$0	\$0	\$0	\$0			\$43,832	\$55,462
6	\$0	\$35,633	\$0	\$8,411	\$0	\$0	\$0	\$0			\$44,044	\$57,959
7	\$0	\$47,905	\$0	\$11,291	\$0	\$0	\$0	\$0	-		\$59,196	\$81,014
8	\$0	\$60,147	\$0	\$14,163	\$0	\$0	\$0	\$0	-		\$74,310	\$105,766
9	\$0	\$60,127	\$0	\$14,159	\$0	\$0	\$0	\$0			\$74,286	\$109,961
10	\$0	\$77,494	\$0	\$19,061	\$0	\$0	\$0	\$0			\$96,555	\$148,642
11	\$0	\$77,252	\$0	\$19,001	\$0	\$0	\$0	\$0	-		\$96,253	\$154,104
12	\$0	\$94,257	\$0	\$23,808	\$0	\$0	\$0	\$0		Mary - Lucian	\$118,065	\$196,587
13	\$0	\$111,731	\$0	\$28,539	\$0	\$0	\$0	\$0			\$140,270	\$242,903
14	\$0	\$110,990	\$0	\$28,350	\$0	\$0	\$0	\$0			\$139,339	\$250,942
15	\$0	\$127,141	\$0	\$33,053	\$0	\$0	\$0	\$0			\$160,194	\$300,041
16	\$0	\$126,046	\$0	\$32,768	\$0	\$0	\$0	\$0	<u>-</u>	-	\$158,815	\$309,355
17	\$0	\$141,542	\$0	\$37,164	\$0	\$0	\$0	\$0		-	\$178,706	\$362,026
18	\$0	\$165,218	\$0	\$45,851	\$0	\$0	\$0	\$0			\$211,069	\$444,691
19	\$0	\$163,375	\$0	\$45,340	\$0	\$0	\$0	\$0		-	\$208,715	\$457,320
Total	\$0	\$1,679,103	\$0	\$436,833	\$0	\$0	\$0	\$0	-	_	\$2,115,937	\$3,907,686

## Vehicle Operating Cost Benefits

This sheet calculates changes in highway vehicle operating costs as benefits for highway and transit projects. Net changes in transit operating costs should be included as project costs.

Formulas:			
Vehicle-Miles Tra	aveled = Affected Length x	Avg. Annual Volume	Non-Fuel Cost = VMT × Cost Per Mile
veh-miles/yr	miles	vehicles/yr	dollars \$/miles
Fuel Cost = VMT	x Fuel Consumption x Fu	el Price	Benefit = Existing Cost - New Cost
dollars	gallons/mile	\$/gallon	



### **HIGHWAY BENEFITS**

#### **Peak Period HOV**

	AVERAGE VOLUME (vehicles/yr)		AVERAGE SPEED (mph)		TOTAL VMT (veh-miles/yr)		BENE (\$/y			
Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
20	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
2	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
3	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
4	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
5	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
6	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
7	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
8	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
9	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
10	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
11	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
12	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
13	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
14	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
15	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
16	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
17	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
18	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
19	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0

#### Peak Period Non-HOV

AVERAGE VOLUME	AVERAGE SPEED	TOTAL VMT	BENEFITS	
(vehicles/yr)	(mph)	(veh-miles/yr)	(\$/yr)	

Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	2,525,122	2,525,122	30.0	30.0	2,525,122	2,525,122	\$0	\$0	\$0	\$0
20	5,159,323	5,159,323	18.6	30.0	5,159,323	5,159,323	\$422,239	\$0	\$422,239	\$185,293
2	2,663,764	2,663,764	29.4	30.0	2,663,764	2,663,764	\$13,212	\$0	\$13,212	\$11,746
3	2,802,407	2,802,407	28.8	30.0	2,802,407	2,802,407	\$27,800	\$0	\$27,800	\$23,763
4	2,941,049	2,941,049	28.2	30.0	2,941,049	2,941,049	\$29,175	\$0	\$29,175	\$23,980
5	3,079,691	3,079,691	27.6	30.0	3,079,691	3,079,691	\$44,871	\$0	\$44,871	\$35,462
6	3,218,333	3,218,333	27.0	30.0	3,218,333	3,218,333	\$46,891	\$0	\$46,891	\$35,633
7	3,356,975	3,356,975	26.4	30.0	3,356,975	3,356,975	\$65,562	\$0	\$65,562	\$47,905
8	3,495,617	3,495,617	25.8	30.0	3,495,617	3,495,617	\$85,608	\$0	\$85,608	\$60,147
9	3,634,259	3,634,259	25.2	30.0	3,634,259	3,634,259	\$89,003	\$0	\$89,003	\$60,127
10	3,772,902	3,772,902	24.6	30.0	3,772,902	3,772,902	\$119,299	\$0	\$119,299	\$77,494
11	3,911,544	3,911,544	24.0	30.0	3,911,544	3,911,544	\$123,683	\$0	\$123,683	\$77,252
12	4,050,186	4,050,186	23.4	30.0	4,050,186	4,050,186	\$156,945	\$0	\$156,945	\$94,257
13	4,188,828	4,188,828	22.8	30.0	4,188,823	4,188,828	\$193,482	\$0	\$193,482	\$111,731
14	4,327,470	4,327,470	22.2	30.0	4,327,470	4,327,470	\$199,886	\$0	\$199,886	\$110,990
15	4,466,112	4,466,112	21.6	30.0	4,466,112	4,466,112	\$238,133	\$0	\$238,133	\$127,141
16	4,604,755	4,604,755	21.0	30.0	4,604,755	4,604,755	\$245,526	\$0	\$245,526	\$126,046
17	4,743,397	4,743,397	20.4	30.0	4,743,397	4,743,397	\$286,738	\$0	\$286,738	\$141,542
18	4,882,039	4,882,039	19.8	30.0	4,882,039	4,882,039	\$348,089	\$0	\$348,089	\$165,218
19	5,020,681	5,020,681	19.2	30.0	5,020,681	5,020,681	\$357,975	\$0	\$357,975	\$163,375

**Peak Period Weaving** 

Total

	AVERAGE VOLUM (vehicles/yr)		AVERAGE (mp		TOTAL (veh-mi		BENE (\$/)	/r)		
Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
20	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
2	0	0 [	55.0	55.0	0	0 [	\$0	\$0	\$0	\$0
3	0	0	55.0	55.0	j j	0	\$0	\$0	\$0	\$0
4	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
5	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
6	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
7	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
8	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
9	0	0	55.0	55.0	O O	0	\$0	\$0	\$0	\$0
10	0	0	55.0	55.0	D O	0	\$0	\$0	\$0	\$0
11	0	0	55.0	55.0	O	.0	\$0	\$0	\$0	\$0
12	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
13	0	0	55.0	55.0	O O	0	\$0	\$0	\$0	\$0
14	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
15	0	0	55.0	55.0	)	0	\$0	\$0	\$0	\$0
16	0	0	55.0	55.0	)	0	\$0	\$0	\$0	\$0
17	0	0	55.0	55.0	)	0	\$0	\$0	\$0	\$0
18	0	0	55.0	55.0	)	0	\$0	\$0	\$0	\$0
19	0	0	55.0	55.0	)	0	\$0	\$0	\$0	\$0

\$1,679,103

Total \$0

#### **Peak Period Truck**

	AVERAGE	VOLUME	AVERAGE	SPEED	TOTAL	VMT	BENE	FITS		
	(vehicle	es/yr)	(mph)		(veh-miles/yr)		(\$/yr)			
Year							Fuel	Non-Fuel	Constant	Present
	No Build	Build	No Build	Build	No Build	Build	Costs	Costs	Dollars	Value
1	411,066	411,066	30.0	30.0	411,066	411,066	\$0	\$0	\$0	\$0
20	839,890	839,890	18.6	30.0	839,890	839,890	\$122,015	\$0	\$122,015	\$53,544
0	400.000	400 000	20.4	20.0.	433,636	433,636	£2.100	\$0	\$3,100	<b>60.750</b>
2	433,636	433,636	29.4	30.0			\$3,100	\$0		\$2,756
3	456,206	456,206	28.8	30.0	456,206	456,206	\$6,524		\$6,524	\$5,577
4	478,775	478,775	28.2	30.0	478,775	478,775	\$6,846	\$0	\$6,846	\$5,627
5	501,345	501,345	27.6	30.0	501,345	501,345	\$10,591	\$0	\$10,591	\$8,370
6	523,915	523,915	27.0	30.0	523,915	523,915	\$11,068	\$0	\$11,068	\$8,411
7	546,484	546,484	26.4	30.0	546,484	546,484	\$15,452	\$0	\$15,452	\$11,291
8	569,054	569,054	25.8	30.0	569,054	569,054	\$20,159	\$0	\$20,159	\$14,163
9	591,624	591,624	25.2	30.0	591,624	591,624	\$20,958	\$0	\$20,958	\$14,159
10	614,193	614,193	24.6	30.0	614,193	614,193	\$29,343	\$0	\$29,343	\$19,061
11	636,763	636,763	24.0	30.0	636,763	636,763	\$30,421	\$0	\$30,421	\$19,001
12	659,333	659,333	23.4	30.0	659,333	659,333	\$39,642	\$0	\$39,642	\$23,808
13	681,902	681,902	22.8	30.0	681,902	681,902	\$49,421	\$0	\$49,421	\$28,539
14	704,472	704,472	22.2	30.0	704,472	704,472	\$51,057	\$0	\$51,057	\$28,350
15	727,042	727,042	21.6	30.0	727,042	727,042	\$61,908	\$0	\$61,908	\$33,053
16	749,611	749,611	21.0	30.0	749,611	749,611	\$63,829	\$0	\$63,829	\$32,768
17	772,181	772,181	20.4	30.0	772,181	772,181	\$75,288	\$0	\$75,288	\$37,164
18	794,751	794,751	19.8	30.0	794,751	794,751	\$96,602	\$0	\$96,602	\$45,851
19	817,320	817,320	19.2	30.0	817,320	817,320	\$99,345	\$0	\$99,345	\$45,340

Total	\$436,833
-------	-----------

#### **Peak Period Arterial**

	AVERAGE V (vehicles		AVERAGE SPEED (mph)		TOTAL (veh-mile		BENE (\$/y			
Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
20	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
2	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
3	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
4	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
5	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
6	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
7	0	0	5.0	5.0	Ð	0	\$0	\$0	\$0	\$0
8	0	0	5.0	5.0	O	0	\$0	\$0	\$0	\$0
9	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
10	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
11	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
12	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
13	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0

14	0	0	5.0	5.0	. 0	0	\$0	\$0	\$0	\$0
15	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
16	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
17	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
18	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0
19	0	0	5.0	5.0	0	0	\$0	\$0	\$0	\$0

I Total	

#### Non-Peak Period Non-HOV

	AVERAGE \ (vehicle:		AVERAGE (mph		TOTAL (veh-mile		BENE (\$/y			
Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	4,879,928	4,879,928	30.0	30.0	4,879,928	4,879,928	\$0	\$0	\$0	\$
20	9,970,657	9,970,657	30.0	30.0	9,970,657	9,970,657	\$0	\$0	\$0	\$
2	5,147,861	5,147,861	30.0	30.0	5,147,861	5,147,861	\$0	\$0	\$0	\$
3	5,415,794	5,415,794	30.0	30.0	5,415,794	5,415,794	\$0	\$0	\$0	\$ \$
4	5,683,728	5,683,728	30.0	30.0	5,683,728	5,683,728	\$0	\$0	\$0	\$
5	5,951,661	5,951,661	30.0	30.0	5,951,661	5,951,661	\$0	\$0	\$0	\$
6	6,219,594	6,219,594	30.0	30.0	6,219,594	6,219,594	\$0	\$0	\$0	\$
7	6,487,527	6,487,527	30.0	30.0	6,487,527	6,487,527	\$0	\$0	\$0	\$
8	6,755,460	6,755,460	30.0	30.0	6,755,460	6,755,460	\$0	\$0	\$0	\$
9	7,023,393	7,023,393	30.0	30.0	7,023,393	7,023,393	\$0	\$0	\$0	\$
10	7,291,326	7,291,326	30.0	30.0	7,291,326	7,291,326	\$0	\$0	\$0	\$
11	7,559,259	7,559,259	30.0	30.0	7,559,259	7,559,259	\$0	\$0	\$0	\$
12	7,827,192	7,827,192	30.0	30.0	7,827,192	7,827,192	\$0	\$0	\$0	\$
13	8,095,125	8,095,125	30.0	30.0	8,095,125	8,095,125	\$0	\$0	\$0	\$
14	8,363,058	8,363,058	30.0	30.0	8,363,058	8,363,058	\$0	\$0	\$0	\$
15	8,630,991	8,630,991	30.0	30.0	8,630,991	8,630,991	\$0	\$0	\$0	\$
16	8,898,924	8,898,924	30.0	30.0	8,898,924	8,898,924	\$0	\$0	\$0	\$
17	9,166,858	9,166,858	30.0	30.0	9,166,858	9,166,858	\$0	\$0	\$0	\$
18	9,434,791	9,434,791	30.0	30.0	9,434,791	9,434,791	\$0	\$0	\$0	\$
19	9,702,724	9,702,724	30.0	30.0	9,702,724	9,702,724	\$0	\$0	\$0	\$

### Non-Peak Period Weaving

	AVERAGE VOLUME (vehicles/yr)		AVERAGE SPEED (mph)		TOTAL (veh-mile		BENE (\$/y			
Year	No Build	Build	No Build	Build	No Build	Build	Fuel Costs	Non-Fuel Costs	Constant Dollars	Present Value
1	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
20	0	0	55.0	55.0	Ð	0	\$0	\$0	\$0	\$0
2	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
3	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
4	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
5	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
6	0	. 0	55.0	55.0	0	. 0	\$0	\$0	\$0	\$0

7	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
8	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
9	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
10	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
11	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
12	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
13	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
14	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
15	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
16	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
17	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
18	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0
19	0	0	55.0	55.0	0	0	\$0	\$0	\$0	\$0

#### Non-Peak Period Truck

Total

	AVERAGE \	OLUME	AVERAGE	SPEED	TOTAL	VMT	BENE	FITS		
	(vehicle	s/yr)	(mph	1)	(veh-mi	les/yr)	(\$/)	rr)		
Year							Fuel	Non-Fuel	Constant	Present
	No Build	Build	No Build	Build	No Build	Build	Costs	Costs	Dollars	Value
1	794,407	794,407	30.0	30.0	794,407	794,407	\$0	\$0	\$0	\$0
20	1,623,130	1,623,130	30.0	30.0	1,623,130	1,623,130	\$0	\$0	\$0	\$0
2	838,024	838,024	30.0	30.0	838,024	838,024	\$0	\$0	\$0	\$0
3	881,641	881,641	30.0	30.0	881,64	881,641	\$0	\$0	\$0	\$0
4	925,258	925,258	30.0	30.0	925,258	925,258	\$0	\$0	\$0	\$0
5	968,875	968,875	30.0	30.0	968,875	968,875	\$0	\$0	\$0	\$0
6	1,012,492	1,012,492	30.0	30.0	1,012,492	1,012,492	\$0	\$0	\$0	\$0
7	1,056,109	1,056,109	30.0	30.0	1,056,109	1,056,109	\$0	\$0	\$0	\$0
8	1,099,726	1,099,726	30.0	30.0	1,099,726	1,099,726	\$0	\$0	\$0	\$0
9	1,143,343	1,143,343	30.0	30.0	1,143,343	1,143,343	\$0	\$0	\$0	\$0
10	1,186,960	1,186,960	30.0	30.0	1,186,960	1,186,960	\$0	\$0	\$0	\$0
11	1,230,577	1,230,577	30.0	30.0	1,230,577	1,230,577	\$0	\$0	\$0	\$0
12	1,274,194	1,274,194	30.0	30.0	1,274,194	1,274,194	\$0	\$0	\$0	\$0
13	1,317,811	1,317,811	30.0	30.0	1,317,811	1,317,811	\$0	\$0	\$0	\$0
14	1,361,428	1,361,428	30.0	30.0	1,361,428	1,361,428	\$0	\$0	\$0	\$0
15	1,405,045	1,405,045	30.0	30.0	1,405,045	1,405,045	\$0	\$0	\$0	\$0
16	1,448,662	1,448,662	30.0	30.0	1,448,662	1,448,662	\$0	\$0	\$0	\$0
17	1,492,279	1,492,279	30.0	30.0	1,492,279	1,492,279	\$0	\$0	\$0	\$0
18	1,535,896	1,535,896	30.0	30.0	1,535,896	1,535,896	\$0	\$0	\$0	\$0
19	1,579,513	1,579,513	30.0	30.0	1,579,513	1,579,513	\$0	\$0	\$0	\$0

Present Value = Future Value (in Constant Dollars)
(1 + Real Discount Rate) ^ Year

#### C

## **SUMMARY OF ACCIDENT REDUCTION BENEFITS**

				HIGHV	VAY				TRANSIT	Present Value of		
Year	Peak	Peak	Peak	Peak	Peak	Non-Peak	Non-Peak	Non-Peak	All	Accident	Constant	
	HOV	Non-HOV	Weaving	Truck	Arterial	Non-HOV	Weaving	Truck	Periods	Benefits	Dollars	
1	\$0	\$334,048	\$0	\$54,380	\$0	\$645,565	\$0	\$105,092	\$0	\$1,139,085	\$1,232,034	
20	\$0	\$323,956	\$0	\$52,737	\$0	\$626,061	\$0	\$101,917	\$0	\$1,104,671	\$2,517,289	
2	\$0	\$338,836	\$0	\$55,159	\$0	\$654,817	\$0	\$106,598	\$0	\$1,155,410	\$1,299,679	
3	\$0	\$342,761	\$0	\$55,798	\$0	\$662,403	\$0	\$107,833	\$0	\$1,168,795	\$1,367,324	
4	\$0	\$345,883	\$0	\$56,306	\$0	\$668,436	\$0	\$108,815	\$0	\$1,179,440	\$1,434,969	
5	\$0	\$348,257	\$0	\$56,693	\$0	\$673,025	\$0	\$109,562	\$0	\$1,187,538	\$1,502,614	
6	\$0	\$349,938	\$0	\$56,967	\$0	\$676,273	\$0	\$110,091	\$0	\$1,193,268	\$1,570,259	
7	\$0	\$350,974	\$0	\$57,135	\$0	\$678,275	\$0	\$110,417	\$0	\$1,196,801	\$1,637,904	
8	\$0	\$351,412	\$0	\$57,207	\$0	\$679,122	\$0	\$110,555	\$0	\$1,198,296	\$1,705,549	
9	\$0	\$351,298	\$0	\$57,188	\$0	\$678,902	\$0	\$110,519	\$0	\$1,197,907	\$1,773,194	
10	\$0	\$350,673	\$0	\$57,086	\$0	\$677,693	\$0	\$110,322	\$0	\$1,195,774	\$1,840,839	
11	\$0	\$349,576	\$0	\$56,908	\$0	\$675,573	\$0	\$109,977	\$0	\$1,192,034	\$1,908,484	
12	\$0	\$348,044	\$0	\$56,658	\$0	\$672,614	\$0	\$109,495	\$0	\$1,186,812	\$1,976,129	
13	\$0	\$346,114	\$0	\$56,344	\$0	\$668,883	\$0	\$108,888	\$0	\$1,180,229	\$2,043,774	
14	\$0	\$343,817	\$0	\$55,970	\$0	\$664,444	\$0	\$108,165	\$0	\$1,172,396	\$2,111,419	
15	\$0	\$341,185	\$0	\$55,542	\$0	\$659,357	\$0	\$107,337	\$0	\$1,163,420	\$2,179,064	
16	\$0	\$338,246	\$0	\$55,063	\$0	\$653,678	\$0	\$106,413	\$0	\$1,153,400	\$2,246,709	
17	\$0	\$335,029	\$0	\$54,540	\$0	\$647,461	\$0	\$105,401	\$0	\$1,142,430	\$2,314,354	
18	\$0	\$331,559	\$0	\$53,975	\$0	\$640,755	\$0	\$104,309	\$0	\$1,130,598	\$2,381,999	
19	\$0	\$327,860	\$0	\$53,373	\$0	\$633,607	\$0	\$103,145	\$0	\$1,117,986	\$2,449,644	
Total	\$0	\$6,849,465	\$0	\$1,115,029	\$0	\$13,236,944	\$0	\$2,154,851	\$0	\$23,356,290	\$37,493,236	

## **SUMMARY OF EMISSION REDUCTION BENEFITS**

	HIGHWAY													
Year	Peak HOV	Peak Non-HOV	Peak Weaving	Peak Truck	Peak Ramp	Peak Arterial	Non-Peak Non-HOV	Non-Peak Weaving	Non-Peak Truck					
1	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0					
20	\$0	\$40,056	\$0	\$16,379	\$0	\$0	\$0	\$0	\$0					
		4.0,000	40	4.0,0.0			40	40	40					
2	\$0	\$2,035	\$0	\$1,836	\$0	\$0	\$0	\$0	\$0					
3	\$0	\$4,188	\$0	\$3,728	\$0	\$0	\$0	\$0	\$0					
4	\$0	\$4,285	\$0	\$3,776	\$0	\$0	\$0	\$0	\$0					
5	\$0	\$6,521	\$0	\$5,719	\$0	\$0	\$0	\$0	\$0					
6	\$0	\$6,646	\$0	\$5,768	\$0	\$0	\$0	\$0	\$0					
7	\$0	\$9,019	\$0	\$7,745	\$0	\$0	\$0	\$0	\$0					
8	\$0	\$10,562	\$0	\$3,803	\$0	\$0	\$0	\$0	\$0					
9	\$0	\$10,723	\$0	\$3,843	\$0	\$0	\$0	\$0	\$0					
10	\$0	\$14,144	\$0	\$5,199	\$0	\$0	\$0	\$0	\$0					
11	\$0	\$14,321	\$0	\$5,240	\$0	\$0	\$0	\$0	\$0					
12	\$0	\$17,833	\$0	\$6,615	\$0	\$0	\$0	\$0	\$0					
13	\$0	\$21,393	\$0	\$8,002	\$0	\$0	\$0	\$0	\$0					
14	\$0	\$21,587	\$0	\$8,040	\$0	\$0	\$0	\$0	\$0					
15	\$0	\$25,203	\$0	\$9,437	\$0	\$0	\$0	\$0	\$0					
16	\$0	\$25,384	\$0	\$9,465	\$0	\$0	\$0	\$0	\$0					
17	\$0	\$28,994	\$0	\$10,855	\$0	\$0	\$0	\$0	\$0					
18	\$0	\$34,432	\$0	\$13,619	\$0	\$0	\$0	\$0	\$0					
19	\$0	\$34,595	\$0	\$13,629	\$0	\$0	\$0	\$0	\$0					
Total	\$0	\$331,919	\$0	\$142,697	\$0	\$0	\$0	\$0	\$0					

## (C)

## **SUMMARY OF EMISSION REDUCTION BENEFITS (continued)**

		TRA	NSIT		Present Value of		AD CO <sub>2</sub>
Year	Peak Bus	Non-Peak Bus	Passenger Rail	Light Rail	Emission Benefits	Constant Dollars	tons/yr
1	\$0	\$0	\$0	\$0	\$0	\$0	tolis/yl
20	\$0	\$0	\$0	\$0	\$56,434	\$128,601	(1,7
20	ΨΟ	ΨΟΙ	ΨΟ	ΨΟ	ΨΟΟ, ΤΟΤ	Ψ120,001	(1,7
2	\$0	\$0	\$0	\$0	\$3,871	\$4,354	
3	\$0	\$0	\$0	\$0	\$7,916	\$9,260	(1
4	\$0	\$0	\$0	\$0	\$8,061	\$9,807	(1
5	\$0	\$0	\$0	\$0	\$12,240	\$15,487	(1
6	\$0	\$0	\$0	\$0	\$12,414	\$16,336	(1
7	\$0	\$0	\$0	\$0	\$16,764	\$22,943	(2
8	\$0	\$0	\$0	\$0	\$14,365	\$20,445	(2
9	\$0	\$0	\$0	\$0	\$14,566	\$21,561	(3
10	\$0	\$0	\$0	\$0	\$19,343	\$29,777	(4
11	\$0	\$0	\$0	\$0	\$19,561	\$31,317	(4
12	\$0	\$0	\$0	\$0	\$24,447	\$40,706	(6
13	\$0	\$0	\$0	\$0	\$29,394	\$50,901	(7
14	\$0	\$0	\$0	\$0	\$29,627	\$53,357	(7
15	\$0	\$0	\$0	\$0	\$34,640	\$64,880	(9
16	\$0	\$0	\$0	\$0	\$34,849	\$67,883	(9
17	\$0	\$0	\$0	\$0	\$39,850	\$80,728	(1,1
18	\$0	\$0	\$0	\$0	\$48,051	\$101,236	(1,4
19	\$0	\$0	\$0	\$0	\$48,224	\$105,666	(1,4
Total	\$0	\$0	\$0	\$0	\$474,616	\$875,246	(12,3

ADDITIONAL CO <sub>2</sub> EMISSIONS											
tons/yr	PV \$/yr										
0	\$0										
(1,722)	(\$42,369)										
(50)	(\$1,760)										
(106)	(\$3,632)										
(111)	(\$3,738)										
(175)	(\$5,759)										
(183)	(\$5,902)										
(254)	(\$8,051)										
(331)	(\$10,284)										
(344)	(\$10,486)										
(467)	(\$13,970)										
(485)	(\$14,205)										
(620)	(\$17,826)										
(764)	(\$21,531)										
(789)	(\$21,816)										
(945)	(\$25,620)										
(974)	(\$25,907)										
(1,142)	(\$29,788)										
(1,402)	(\$35,874)										
(1,442)	(\$36,183)										
(12,306)	(\$334,701)										

#### A

### **NET PRESENT VALUE CALCULATION**

	PR	ESENT VALUE O	F USER BENEFIT	rs	PRE	SENT VALUE C	F USER BENEFI d 2)	TS	Pl		OF USER BENEF ad 3)	ITS	Present Value	Present Value	
Year	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	of Total User Benefits	of Total Project Costs	NET PRESENT VALUE
Construc	tion Period														
1													\$0	\$40,400,000	(\$40,400,000)
2				BUT HOUSE									\$0	\$24,519,231	(\$24,519,231)
3													\$0	\$0	\$0
4													\$0	\$0	\$0
5				, T									\$0	\$0	\$0
6													\$0	\$0	\$0 \$0 \$0 \$0
7								1 3 14					\$0	\$0	\$0
8						15	0.012 0.01			14 3 14 1		17	\$0	\$0	\$0
Project O															
1	\$0	\$0	\$1,139,085	\$0	\$35,424	(\$161,725)	\$1,302,283	(\$73,254)					\$2,241,813	\$0	\$2,241,813
2	\$29,016	\$14,502	\$1,155,410	\$3,871	\$39,778	(\$146,097)	\$1,278,388	(\$65,533)					\$2,309,336	\$0	\$2,309,336
3	\$59,928	\$29,340	\$1,168,795	\$7,916	\$44,596	(\$134,793)	\$1,254,405	(\$61,906)					\$2,368,280	\$0	\$2,368,280
4	\$92,641	\$29,607	\$1,179,440	\$8,061	\$49,958	(\$109,375)	\$1,230,375	(\$53,157)					\$2,427,551	\$0	\$2,427,551
5	\$127,073	\$43,832	\$1,187,538	\$12,240	\$55,967	(\$89,147)	\$1,206,338	(\$46,773)					\$2,497,068	\$0	\$2,497,068
6	\$163,154	\$44,044	\$1,193,268	\$12,414	\$62,746	(\$65,253)	\$1,182,330	(\$39,383)					\$2,553,321	\$0	\$2,553,321
7	\$200,827	\$59,196	\$1,196,801	\$16,764	\$70,457	(\$32,060)	\$1,158,385	(\$28,076)					\$2,642,295	\$0	\$2,642,295
8	\$240,047	\$74,310	\$1,198,296	\$14,365	\$79,307	(\$3,931)	\$1,134,532	(\$2,055)					\$2,734,872	\$0	\$2,734,872
9	\$280,780	\$74,286	\$1,197,907	\$14,566	\$89,568	\$28,993	\$1,110,801	\$4,702					\$2,801,601	\$0	\$2,801,601
10	\$323,006	\$96,555	\$1,195,774	\$19,343	\$101,602	\$66,524	\$1,087,216	\$12,380					\$2,902,401	\$0	\$2,902,401
11	\$366,717	\$96,253	\$1,192,034	\$19,561	\$115,909	\$102,119	\$1,063,803	\$19,714					\$2,976,110	\$0	\$2,976,110
12	\$411,920	\$118,065	\$1,186,812	\$24,447	\$133,188	\$148,377	\$1,040,583	\$29,606					\$3,092,997	\$0	\$3,092,997
13	\$458,634	\$140,270	\$1,180,229	\$29,394	\$154,452	\$217,052	\$1,017,575	\$44,626					\$3,242,233	\$0	\$3,242,233
14	\$506,896	\$139,339	\$1,172,396	\$29,627	\$181,230	\$258,955	\$994,797	\$54,369					\$3,337,609	\$0	\$3,337,609
15	\$556,756	\$160,194	\$1,163,420	\$34,640	\$215,929	\$357,223	\$972,266	\$77,682					\$3,538,111	\$0	\$3,538,111
16	\$608,283	\$158,815	\$1,153,400	\$34,849	\$262,584	\$403,352	\$949,997	\$89,330					\$3,660,611	\$0	\$3,660,611
17	\$661,566	\$178,706	\$1,142,430	\$39,850	\$328,495	\$540,004	\$928,003	\$123,253					\$3,942,308	\$0	\$3,942,308
18	\$716,714	\$211,069	\$1,130,598	\$48,051	\$428,368	\$617,188	\$906,295	\$143,747					\$4,202,030	\$0	\$4,202,030
19	\$773,858	\$208,715	\$1,117,986	\$48,224	\$596,887	\$777,376	\$884,884	\$184,054					\$4,591,984	\$0	\$4,591,984
20	\$833,158	\$238,837	\$1,104,671	\$56,434	\$940,020	\$872,123	\$863,780	\$209,551			Red Carolis		\$5,118,575	\$0	\$5,118,575
			the contribution		1 - 2 1 1 1 1 1			Mary Mary 1991					A THE RESERVE THE PERSON OF TH		
Total	\$7,410,974	\$2,115,937	\$23,356,290	\$474,616	\$3,986,467	\$3,646,908	\$21,567,036	\$622,878	\$0	\$0	\$0	\$0	\$63,181,104	\$64,919,231	(\$1,738,126)

Г	1,003,793	Person-Hours of Time Saved
Γ	(12,306)	Additional CO <sub>2</sub> Emissions (tons)
Γ	(\$334,701)	Additional CO <sub>2</sub> Emissions (\$ PV)

(77,633)	Person-Hours of Time Saved
(25,602)	Additional CO2 Emissions (tons)
(\$643,547)	Additional CO2 Emissions (\$ PV)

Person-Hours of Time Saved
Additional CO <sub>2</sub> Emissions (tons)
Additional CO <sub>2</sub> Emissions (\$ PV)

Transportation Economics Caltrans DOTP

## $\bigcirc$ B

#### INTERNAL RATE OF RETURN ON INVESTMENT AND PAYBACK PERIOD

	USEF	R BENEFITS IN C	ONSTANT DOLL	ARS	USER	BENEFITS IN C		ARS	USE		CONSTANT DOLL	ARS	Totallian	Total	ANNUAL	CUMULATIVE
Year	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	Travel Time Savings	Vehicle Op. Cost Savings	Accident Reductions	Vehicle Emission Reductions	Total User Benefits in Constant Dollars	Project Costs in Constant Dollars	RETURNS ON INVESTMENT	RETURNS AFTER PROJ OPENS
Constru	tion Period															
1													\$0	\$40,400,000	(\$40,400,000)	
2													\$0 \$0	\$25,500,000	(\$25,500,000)	
3								THE SET OF					\$0	\$0 \$0	\$0 \$0	
4													\$0	\$0	\$0	
5 6													\$0	\$0	\$0	
7													\$0	\$0	\$0	
8													\$0	\$0	\$0	
Project C	non												30	30	30	
1	\$0 I	\$0	\$1,232,034	\$0	\$38,315	(\$174,922)	\$1,408,549	(\$79,232)	STATE OF THE PARTY	Section 1988			\$2,424,745	\$0	\$2,424,745	\$2,424,745
2	\$32,639	\$16.313	\$1,299,679	\$4,354	\$44.745	(\$164,339)	\$1,438,013	(\$73,715)					\$2,597,689	\$0	\$2,597,689	\$5,022,434
3	\$70.107	\$34,324	\$1,367,324	\$9,260	\$52,171	(\$157.688)	\$1,467,476	(\$72,421)	AND ALL STREET	E-Market Balling	NO STATE OF TAXABLE	CONTRACTOR OF THE PARTY OF THE	\$2,770,552	\$0	\$2,770,552	\$7,792,986
4	\$112,712	\$36,022	\$1,434,969	\$9,807	\$60,782	(\$133,071)	\$1,496,939	(\$64,673)			Procedure and Procedure		\$2,953,487	\$0	\$2,953,487	\$10,746,474
5	\$160,787	\$55,462	\$1,502,614	\$15,487	\$70.816	(\$112.799)	\$1.526.403	(\$59,183)	CONTRACTOR OF THE PERSON			E-SIGNAL SERVICES	\$3,159,587	\$0	\$3,159,587	\$13,906,061
6	\$214,700	\$57,959	\$1,570,259	\$16,336	\$82,570	(\$85,868)	\$1,555,866	(\$51,826)		ARCHIO CONTO			\$3,359,996	\$0	\$3,359,996	\$17,266,057
7	\$274.846	\$81,014	\$1,637,904	\$22,943	\$96,426	(\$43,876)	\$1,585,330	(\$38,424)					\$3,616,163	\$0	\$3,616,163	\$20,882,220
8	\$341,662	\$105,766	\$1,705,549	\$20,445	\$112,879	(\$5,595)	\$1,614,793	(\$2,925)					\$3,892,575	\$0	\$3,892,575	\$24,774,795
9	\$415,623	\$109,961	\$1,773,194	\$21,561	\$132,582	\$42,916	\$1,644,256	\$6,961				NO STATE OF THE PARTY OF	\$4,147,054	\$0	\$4,147,054	\$28,921,849
10	\$497,253	\$148,642	\$1,840,839	\$29,777	\$156,412	\$102,410	\$1,673,720	\$19,059	ROME LANGE		CONTRACTOR		\$4,468,112	\$0	\$4,468,112	\$33,389,962
11	\$587,126	\$154,104	\$1,908,484	\$31,317	\$185,574	\$163,496	\$1,703,183	\$31,563					\$4,764,848	\$0	\$4,764,848	\$38,154,810
12	\$685,877	\$196,587	\$1,976,129	\$40,706	\$221,767	\$247,058	\$1,732,647	\$49,296	REPRESENTATION OF				\$5,150,067	\$0	\$5,150,067	\$43,304,877
13	\$794,206	\$242,903	\$2,043,774	\$50,901	\$267,462	\$375,864	\$1,762,110	\$77,278			Marie Constant		\$5,614,498	\$0	\$5,614,498	\$48,919,376
14	\$912,890	\$250,942	\$2,111,419	\$53,357	\$326,385	\$466,363	\$1,791,573	\$97,915					\$6,010,845	\$0	\$6,010,845	\$54,930,221
15	\$1,042,793	\$300,041	\$2,179,064	\$64,880	\$404,432	\$669,072	\$1,821,037	\$145,497					\$6,626,815	\$0	\$6,626,815	\$61,557,036
16	\$1,184,875	\$309,355	\$2,246,709	\$67,883	\$511,488	\$785,690	\$1,850,500	\$174,006					\$7,130,507	\$0	\$7,130,507	\$68,687,542
17	\$1,340,212	\$362,026	\$2,314,354	\$80,728	\$665,470	\$1,093,950	\$1,879,963	\$249,688		DISTRIBUTED OF			\$7,986,392	\$0	\$7,986,392	\$76,673,934
18	\$1,510,008	\$444,691	\$2,381,999	\$101,236	\$902,507	\$1,300,323	\$1,909,427	\$302,852				RESERVE SEASON	\$8,853,043	\$0	\$8,853,043	\$85,526,977
19	\$1,695,618	\$457,320	\$2,449,644	\$105,666	\$1,307,853	\$1,703,327	\$1,938,890	\$403,284					\$10,061,602	\$0	\$10,061,602	\$95,588,579
20	\$1,898,574	\$544,254	\$2,517,289	\$128,601	\$2,142,089	\$1,987,367	\$1,968,354	\$477,518					\$11,664,046	\$0	\$11,664,046	\$107,252,625
Total	\$13,772,508	\$3.907.686	\$37.493.236	\$875,246	\$7.782.723	\$8,059,678	\$33,769,029	\$1,592,519	\$0	\$0	\$0	\$0 l	\$107,252,625	\$65,900,000	\$41,352,625	

Years After Construction Begins	ANNUAL RETURNS ON INVESTMENT
1	(\$40,400,000
2	(\$25,500,000
3	\$2,424,745
4	\$2,597,689
5	\$2,770,552
6	\$2,953,487
7	\$3,159,587
8	\$3,359,996
9	\$3,616,163
10	\$3,892,575
11	\$4,147,054
12	\$4,468,112
13	\$4,764,848
14	\$5,150,067
15	\$5,614,498
16	\$6,010,845
17	\$6,626,815
18	\$7,130,507
19	\$7,986,392
20	\$8,853,043
21	\$10,061,602
22	\$11,664,046
23	\$(
24	\$(
25	\$(
26	\$(
27	\$(
28	\$0

of Return

Payback Period

16 years


Total Construction Costs

\$65,900,000

#### **Parameters**

This page contains all economic values and rate tables.

To update economic values automatically, change "Economic Update Factor."



rel Time Parameters		Value	Units	
Statewide Average Hourly Wage	\$	23.20	\$/hr	3
Clateride Average Flourity vvage	9	23.20	<b>3</b> /111	13
Transportation and Warehousing				
Average Hourly Wage	\$	21.13	\$/hr	3
Benefits and Costs	\$	7.56	\$/hr	4
Value of Time				
Automobile	\$	11.60	\$/hr/per	5
Truck	\$	28.70	\$/hr/veh	5
Auto & Truck Composite	\$	16.30	\$/hr/veh	6
Transit	\$	11.60	\$/hr/per	5
Out-of-Vehicle Travel		2	times	5
Incident-Related Travel		3	times	7
icle Operating Cost Parameters				
Average Fuel Price				
Automobile (regular unleaded)	\$	3.71	\$/gal	8
Truck (diesel)	\$	3.94	\$/gal	8
Sales and Fuel Taxes				
State Sales Tax	-	7.25%		9
Average Local Sales Tax		0.50%	%	9
Federal Fuel Excise Tax (gasoline)	\$	0.184	\$/gal	9
Federal Fuel Excise Tax (diesel)	\$	0.244	\$/gal	9
State Fuel Excise Tax	\$	0.18	\$/gal	9
Fuel Cost Per Gallon (Exclude Taxes)				
Automobile	3	3.10	\$/gal	
Truck	\$	3.25	\$/gal	
Non-Fuel Cost Per Mile				
Automobile	S	0.239	\$/mi	11
Truck	\$	0.360	\$/mi	1
Idling Speed for Op. Costs and Emissions		5	mph	
ident Cost Parameters				
Cost of a Fatality	\$	4,100,000	\$/event	1:
Cost of an Injury		000 500		1.
Level A (Severe)	\$	206,500 51,800	\$/event \$/event	13
Level B (Moderate)	S		\$/event	1.
Lavel C (Minor)		25,100	\$/event	7.
Level C (Minor)	3			1:
Level C (Minor)  Cost of Property Damage	\$	2,300	\$/event	
		2,300	\$/event	
Cost of Property Damage		2,300	\$/event	8
Cost of Property Damage Cost of Highway Accident	\$			
Cost of Property Damage  Cost of Highway Accident Fatal Accident	\$	4,600,000	\$/accident	
Cost of Property Damage  Cost of Highway Accident Fatal Accident Injury Accident	\$ \$	4,600,000 64,600	\$/accident \$/accident	
Cost of Property Damage  Cost of Highway Accident Fatal Accident Injury Accident PDO Accident Average Cost	\$ \$ \$	4,600,000 64,600 9,400	\$/accident \$/accident \$/accident	
Cost of Property Damage  Cost of Highway Accident Fatal Accident Injury Accident PDO Accident Average Cost  Statewide Highway Accident Rates	\$ \$ \$	4,600,000 64,600 9,400 50,200	\$/accident \$/accident \$/accident \$/accident	
Cost of Property Damage  Cost of Highway Accident Fatal Accident Injury Accident PDO Accident Average Cost  Statewide Highway Accident Rates Fatal Accident	\$ \$ \$	4,600,000 64,600 9,400 50,200	\$/accident \$/accident \$/accident \$/accident	
Cost of Property Damage  Cost of Highway Accident Fatal Accident Injury Accident PDO Accident Average Cost  Statewide Highway Accident Rates	\$ \$ \$	4,600,000 64,600 9,400 50,200 0.009 0.31	\$/accident \$/accident \$/accident \$/accident	14 14 14 14

Sources: 1) Office of Management and Budget (OMB), 2) Review of OMB and State Treasurer's Office data, 3) Bureau of Labor Statistics (BLS) QCEW, 4) BLS Employment Cost Index, 5) USDOT Department Guidance, 6) California Department of Transportation TSI and Traffic Operations, 7) IDAS model, 8) AAD Daily Fuel Gauge Report, 9) Transportation Funding in California, 10) AAA Your Driving Costs, 11) FHWA Office of Freight Management and Operations, 12) Zaniewski et al, 13) National Safety Council, 14) TASAS summary 2006

		Value	Units	
Maximum V/C Ratio		1.56	-	
Percent ADT in Peak Period		34.1%	%	
Percent ADT in Average Peak Hour	40 / 10	8.5%	%	
Annualization Factor		365	days/yr	
			Capacity	Dep. Rate
	Alpha	Beta	(vphpl)	(vphpl)
Freeway	0.20	10	2,000	1,800
Expressway	0.20	10	2,000	1,800
Conventional Highway	0.05	10	800	1,400
HOV Lanes	0.55	8	1,600	
			Capacity	
Non-HOV Lanes	Alpha	Beta	(vphpl)	
No Build	0.05	10	800	
Build	0.20	10	2,000	

Sources: 15) Highway Capacity Manual, 16) NCHRP 387, 17) PeMS data

### Travel Demand Tables

Highway Capacity Expansion			Please select a type of highway project
General Highway	TRUE	GenHwy	
HOV Lane Addition	FALSE	HOV	Enter HOV restriction in section 1B
HOT Lane Addition	FALSE	HOT	Include toll payers as HOVs & check AVOs
Passing Lane	FALSE	Passing	Enter a truck speed in section 1B
Intersection	FALSE	Intersect	Remember to run model for both roads
Bypass	FALSE	Bypass	Remember to run model for both roads
Queuing	FALSE	Queuing	Add arrival rate & check departure rate in 1B
Pavement	FALSE	Pavement	Enter pavement condition in section 1B
Rail or Transit Cap Expansion			Please select a type of rail or transit project
Passenger Rail	FALSE	PassRail	Enter data in both sections 1B & 1E
Light-Rail (LRT)	FALSE	LRT	Enter data in both sections 1B & 1E
Bus	FALSE	Bus	Enter data in both sections 1B & 1E
Hwy-Rail Grade Crossing		HwyRail	Put hwy design in 1B, safety in 1C & crossing in 1D
			,
Hwy Operational Improvement			Please select a type of op. improvement
Auxiliary Lane	FALSE	AuxLane	Enter ramp design speed & on-ramp volume
Freeway Connector	FALSE		Check percent traffic in weave in section 1B
HOV Connector	THE RESERVE OF THE PERSON NAMED IN	-	
			Check percent traffic in weave in section 1R
	FALSE		Check percent traffic in weave in section 1B  Check percent traffic in weave in section 1B
HOV Drop Ramp	FALSE	HOVDrop	Check percent traffic in weave in section 1B
HOV Drop Ramp Off-Ramp Widening	FALSE FALSE	HOVDrop OffRamp	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B
HOV Drop Ramp	FALSE FALSE FALSE	HOVDrop OffRamp OnRamp	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening	FALSE FALSE	HOVDrop OffRamp	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion	FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion	FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Fransp Mgmt Systems (TMS) Ramp Metering	FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Transp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord	FALSE FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Fransp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord Incident Management	FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Transp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord	FALSE FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Fransp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord Incident Management	FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D  Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Iransp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord Incident Management Traveler Information	FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv  RM AM IM TI ASM	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D  Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Iransp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord Incident Management Traveler Information Arterial Signal Management	FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv  RM AM IM TI ASM AVL	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D  Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Complete only sections 1A, 1E & 2C
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Fransp Mgmt Systems (TMS) Ramp Metering Ramp Metering Signal Coord Incident Management Traveler Information Arterial Signal Management Transit Vehicle Location (AVL)	FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv  RM AM IM TI ASM AVL SigPriority	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Complete only sections 1A, 1E & 2C Enter transit agency costs in section 1D
HOV Drop Ramp Off-Ramp Widening On-Ramp Widening HOV-2 to HOV-3 Conv HOT Lane Conversion  Fransp Mgmt Systems (TMS) Ramp Metering Signal Coord Incident Management Traveler Information Arterial Signal Management Transit Vehicle Location (AVL) Transit Vehicle Signal Priority	FALSE	HOVDrop OffRamp OnRamp HOV2to3 HOTConv  RM AM IM TI ASM AVL SigPriority	Check percent traffic in weave in section 1B Check percent traffic in weave in section 1B Enter on-ramp volume & metering strategy Check AVOs & trips in sections 1B & 2D Check AVOs & trips in sections 1B & 2D  Please select a type of TMS project Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Enter model data, if avail, in sections 2A & 2C Complete only sections 1A, 1E & 2C Enter transit agency costs in section 1D Check travel time in section 1D Enter free-flow bus lane speed in section 1B

## DEMAND FOR TRAVEL IN PEAK PERIOD (percent of total daily travel)

Number of		Ur	ban		1 17 17 17 18 18 18 18 18 18 18 18 18 18 18 18 18	
Hours in	So. Ca	lifornia	No. Ca	lifornia	Rural	
Peak Period	Fwy/Exp	Other	Fwy/Exp	Other	Fwy/Exp	Other
1	8.6%	8.6%	8.6%	8.6%	8.6%	8.6%
2	17.2%	17.2%	17.2%	17.2%	17.2%	17.2%
3	25.8%	25.8%	25.8%	25.8%	25.8%	25.8%
4	34.1%	34.1%	34.1%	34.1%	34.1%	34.1%
5	41.0%	41.0%	41.0%	41.0%	41.0%	41.0%
6	47.3%	47.3%	47.3%	47.3%	47.3%	47.3%
7	53.5%	53.5%	53.5%	53.5%	53.5%	53.5%
8	59.6%	59.6%	59.6%	59.6%	59.6%	59.6%
9	65.6%	65.6%	65.6%	65.6%	65.6%	65.6%
10	71.1%	71.1%	71.1%	71.1%	71.1%	71.1%
11	76.5%	76.5%	76.5%	76.5%	76.5%	76.5%
12	81.7%	81.7%	81.7%	81.7%	81.7%	81.7%
13	86.9%	86.9%	86.9%	86.9%	86.9%	86.9%
14	89.9%	89.9%	89.9%	89.9%	89.9%	89.9%
15	92.7%	92.7%	92.7%	92.7%	92.7%	92.7%
16	95.0%	95.0%	95.0%	95.0%	95.0%	95.0%
17	96.7%	96.7%	96.7%	96.7%	96.7%	96.7%
18	97.9%	97.9%	97.9%	97.9%	97.9%	97.9%
19	98.9%	98.9%	98.9%	98.9%	98.9%	98.9%
20	99.5%	99.5%	99.5%	99.5%	99.5%	99.5%
21	99.7%	99.7%	99.7%	99.7%	99.7%	99.7%
22	99.8%	99.8%	99.8%	99.8%	99.8%	99.8%
23	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
24	100.0%	100.0%	100.0%	100.0%	100.0%	100.09

Source: California Department of Transportation, 2000-2001 California Statewide Travel Survey Weekday Travel Report, June 2003

#### **Operating Cost Tables**

## FUEL CONSUMPTION RATES (gal/veh-mi)

 
 Speed
 Auto\*
 Truck

 5
 0.1519
 0.2967

 6
 0.1442
 0.2904

 7
 0.1365
 0.2840
 0.1288 0.2777 9 0.1212 0.2713 10 0.1135 0.2649 0.1083 0.2549 11 0.1032 0.2449 13 0.0980 0.2349 0.0928 0.2248 14 15 0.0877 0.2148 16 0.0842 0.2074 17 0.0808 0.2000 18 0.0773 0.1926 19 0.0739 0.1853 20 21 0.1779 0.1741 0.0704 0.0681 22 0.0658 0.1702 23 0.0634 0.1664 24 0.0611 0.1626 25 0.0588 0.1588 26 0.0572 0.1566 27 0.0556 0.1544 28 0.0541 0.1523 29 0.0525 0.1501 30 0.0509 0.1479 31 0.0499 0.1463 32 0.0489 0.1447 0.0478 0.1431 33 0.0468 0.1415 35 0.0458 0.1399 36 37 0.0451 0.1387 0.0445 0.1376 38 39 40 41 0.0439 0.1364 0.0433 0.1352 0.0426 0.1341 0.0423 0.1333 0.0420 0.1326 0.0417 0.1318 0.0415 0.1310 0.0412 0.1303 42 43 44 45 0.0412 0.1299 47 0.0412 0.1295 48 0.0412 0.1291 49 0.0411 0.1287 50 0.0411 0.1283 51 0.0414 0.1283 0.0417 0.1283 53 0.0420 0.1282 0.0423 0.1282 0.0426 0.1282 0.0432 0.1286 0.0438 0.1290 0.0444 0.1293 55 56 57 58 0.0444 0.0450 0.125, 0.0457 0.1301 0.0467 0.1309 0.1318 59 60 61 0.1318 0.1326 0.1335 0.1343 62 63 0.0487 64 65 0.0497 0.0514 0.1358 0.0521 0.1372 0.0528 0.1386 0.0535 0.1401 66 67 68 69 0.0542 0.1415 0.0542 0.1437 0.0543 0.1460 0.0543 0.1482 70 71 72 73 74 75 0.0544 0.1505 0.0544 0.1527 76 77 0.0545 0.1561 0.0545 0.1596 0.0546 0.1630 0.0547 0.1665 0.0547 0.1699 79

\* Includes motorcycles & motorhomes

Note: Five mph is best estimate for idling

Source: California Air Resources Board, EMFAC 2007 V2.3, 2007 & 2027 average

#### Accident Tables

#### HIGHWAY INJURY SEVERITY FREQUENCY (percent of injuries)

Event	Urban	Suburban	Rural	Average
Severe Injury (A)	4.72%	4.72%	4.72%	4.72%
Other Visible Injury (B)	27.42%	27.42%	27.42%	27.42%
Complaint of Pain (C)	67.87%	67.87%	67.87%	67.87%

Source: 2006 SWITRS Annual Report, Table 7C

## NUMBER OF FATALITIES

(events/accident)

Accident Type	Urban	Suburban	Rural	Average
Fatal Accident	1.11	1.10	1.20	1.15

### NUMBER OF INJURIES

(events/accident)

Accident Type	Urban	Suburban	Rural	Average
Fatal Accident	0.94	1.14	1.35	1.16
Injury Accident	1.46	1.47	1.57	1.49

#### NUMBER OF VEHICLES INVOLVED

Accident Type	Urban	Suburban	Rural	Average
Fatal Accident	1.68	1.63	1.63	1.65
Injury Accident	2.09	2.00	1.61	1.97
PDO Accident	2.04	1.95	1.63	1.96

#### DISTRIBUTION OF ACCIDENT TYPES (percent of accidents)

Accident Type	Urban	Suburban	Rural	Average
Fatal Accident	0.51%	0.78%	2.30%	0.87%
Injury Accident	31.62%	31.78%	38.44%	32.88%
PDO Accident	67.87%	67.45%	59.26%	66.25%

Source: California Department of Transportation, TASAS Unit, 2004 to 2006 average

## COST OF HIGHWAY ACCIDENTS (\$/accident)

Accident Type	Urban	Suburban	Rural	Average
Fatal Accident	\$4,600,000	\$4,600,000	\$5,000,000	\$4,800,000
Injury Accident	\$64,600	\$64,800	\$68,100	\$65,600
PDO Accident	\$9,400	\$9,000	\$7,500	\$9,000
All Types	\$50,200	\$62,400	\$145,700	\$69,300

Source: 18) Urban Institute

#### RATES FOR TRANSIT ACCIDENT EVENTS

Event	Pass Train	Light Rail	Bus
Fatality	0.0371	0.2163	0.0336
Injury	0.3223	3.6319	4.1381
All Accidents	0.2533	8.6060	3.6557

Source: USDOT, Transportation Statistics Annual Report, Table 43, 2003 to 2005 average

#### COST OF TRANSIT ACCIDENT EVENTS

(\$/event)

Event	Pass Train	Light Rail	Bus
Fatality	\$4,100,000	\$4,100,000	\$4,100,000
Injury	\$74,500	\$74,500	\$74,500
Prop Damage	\$133,400	\$7,100	\$3,200

Source: FTA, Transit Safety & Security Statistics, 2003 to 2005 average

#### COSTS OF TRANSIT ACCIDENTS

Value	Pass Train	Light Rail	Bus
Cost	\$209,900	\$1,218,500	\$457,700

Source: Combination of above two tables

#### HIGHWAY-RAIL GRADE CROSSING INCIDENTS

(units in table)

Value	Incident	Fatality	Injury
Total Events	1,665	331	585
Avg per Incident		0.1988	0.3514
Cost per Event		\$4,100,000	\$74,500

Source: FRA, Office of Safety Analysis, 5.11 - Hwy/Rail Incidents Summary Tables, California, Jan 1998 to Dec 2007

## PASSING LANE ACCIDENT REDUCTION FACTORS (rate with passing lane/rate without passing lane)

Minimum ADT	Fatality	Injury	PDO
0	25.0%	69.4%	92.6%
5,000	19.2%	80.3%	96.5%
10,000	84.0%	57.7%	97.8%

Source: Taylor and Jain, 1991

## HIGHWAY EMISSIONS FACTORS (g/mi)

#### Mode Speed voc CO2 SOX Auto 0 7.9768 84.89 0.5771 0.0085 0.0000 0.9653 9.1573 1326.71 1.0373 8.8380 1258.78 0.7335 0.1023 0.0124 0.9792 8.5187 1190.85 0.7127 0.0118 0.9211 8 8.1995 1122.93 0.6918 0.0899 0.0111 0.8631 9 7.8802 1055.00 0.6710 0.0837 0.0104 0.8050 10 7.5609 987 07 0.6501 0.0775 0.0098 0.7469 11 7.3231 941.40 0.6346 0.0738 0.0093 0.7112 12 7.0853 895.74 0.6191 0.0702 0.0089 0.6755 13 6.8475 850.07 0.6036 0.0665 0.0084 0.6397 14 6.6098 804.40 0.5881 0.0629 0.0080 0.6040 15 6.3720 758.74 0.5726 0.0592 0.0076 0.5682 16 0.5613 0.5464 6.2017 728.23 0.0570 0.0073 17 6.0314 697.73 0.5500 0.0548 0.0070 0.5246 18 5.8612 667.23 0.5388 0.0526 0.0067 0.5028 19 5.6909 636.73 0.5275 0.0504 0.0064 0.4810 20 21 5.5206 606.23 0.5162 0.0482 0.0061 0.4592 5.3957 0.0468 0.0059 0.4457 22 5.2708 565.02 0.5000 0.0455 0.0057 0.4321 23 24 5 1459 544 41 0.4919 0.0441 0.0055 0.4186 5.0210 523.81 0.4838 0.0427 0.0053 0.4050 25 4.8962 503.20 0.4757 0.0414 0.0051 0.3915 26 27 28 4.8037 489.32 0.4700 0.0405 0.0049 0.3829 4.7112 475.43 0 4644 0.0396 0.0048 0.3743 0.4587 0.3657 4.6187 461.55 0.0388 0.0047 29 4.5262 447.66 0.4531 0.0379 0.0045 0.3571 30 4.4337 433.78 0.4474 0.0370 0.0044 0.3484 31 32 4.3660 424.66 0.4437 0.0365 0.0043 0.3431 4.2983 415.55 0.4401 0.0359 0.0042 0.3377 33 4.2306 406.43 0.4364 0.0354 0.0041 0.3323 34 4.1629 397.32 0.4327 0.0348 0.0041 0.3269 35 36 4.0952 388.20 0.4291 0.0342 0.0040 0.3216 4.0482 382.68 0.0339 0.0039 0.3184 0.4271 4.0012 0.0039 0.3153 37 38 39 40 41 42 43 44 45 377.16 0.4251 0.0335 3.9542 371.63 0.4231 0.0332 0.0038 0.3121 3.9072 366.11 0.4211 0.0328 0.0037 0.3090 3 8602 360 59 0.4191 0.0325 0.0037 0.3058 3.8324 0.4186 357.97 0.0323 0.0037 0.3044 3.8046 355.36 0.4182 0.0321 0.0036 0.3029 3.7767 352.75 0.4177 0.0319 0.0036 0.3015 3.7489 350.14 0.4172 0.0317 0.0036 0.3000 3.7211 347.53 0.4168 0.0315 0.0036 0.2985 46 3.7133 347.51 0.4177 0.0314 0.0036 0.2985 47 48 49 50 3.7055 347.50 0.4187 0.0313 0.0036 0.2985 3.6978 347.48 0.4197 0.0313 0.0036 0.2985 3.6900 347.46 0.4207 0.0312 0.0036 0.2985 347.44 3.6822 0.4217 0.0311 0.0036 0.2984 51 3.6983 349.99 0.4242 0.0311 0.0036 0.2999 3.7144 3.7304 352.55 355.10 52 53 0.4267 0.0312 0.0036 0.3013 0.4292 0.0312 0.3027 0.0036 3.7465 357.65 0.4317 0.0312 0.0037 0.3041 54 55 56 57 58 59 3.7626 360.20 0.4343 0.0313 0.0037 0.3055 3.8105 365.59 0.4385 0.0314 0.0038 0.3086 370.98 3.8584 0.4427 0.0315 0.0038 0.3117 3.9063 3.9542 381.77 0.4511 0.0318 0.0039 0.3178 60 4.0021 387.16 0.4553 0.0320 0.0040 0.3209 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 4.0968 396.00 0.4616 0.0322 0.0040 0.3262 4.1916 404.84 0.4679 0.0325 0.0041 0.3315 4.2863 413.68 0.4741 0.0328 0.0042 0.3367 4.3811 422.52 0.4804 0.0331 0.0043 0.3420 4.4758 431.36 0.4867 0.0334 0.0044 0.3473 4.5965 437.44 0.4914 0.0336 0.0044 0.3529 4.7173 443.53 0.4962 0.0338 0.0045 0.3585 4.8380 449.62 0.5010 0.0340 0.0046 0.3640 4.9587 455.71 5 0794 461 79 0.5106 0.0345 0.0047 0.3752 5.2254 461.91 0.5124 0.0345 0.3804 0.0047 5.3714 462.03 0.5143 0.0346 0.0047 0.3856 5.5173 462.15 0.0047 0.5162 5.6633 462.27 0.5181 0.0347 0.0047 0.3960 5.8093 462.39 0.5200 0.0348 0.4012 0.0047 6.0704 462.53 0.5227 0.0349 0.0047 0.4097 6.3316 462.67 0.4181 0.5255 0.0350 0.0047 78 79 80 6.5928 462.81 0.5283 0.0351 0.0047 0.4266 462.95 463.10 7.1151 0.5338 0.0353 0.0047 0.4435

## HIGHWAY EMISSIONS FACTORS (g/mi)

Mode	Speed	CO	CO <sub>2</sub>	NO <sub>X</sub>	PM <sub>10</sub>	SO <sub>X</sub>	VOC
Auto	0	1.9386	81.72	0.1143	0.0098	0.0000	0.2697
	5	1.8543	1311.41	0.1593	0.1307	0.0128	0.2336
		1.8184	1244.19	0.1551	0.1226	0.0121	
	7	1.7825	1176.96	0.1508	0.1145	0.0115	0.2121
	8	1.7467	1109.73	0.1466	0.1063	0.0108	0.2013
	9	1.7108	1042.50	0.1423	0.0982	0.0102	0.1906
	10	1.6750	975.27	0.1380	0.0901	0.0095	0.1798
	11	1.6417	929.97	0.1347	0.0854	0.0091	0.1730
	12	1.6084	884.67	0.1314	0.0808	0.0087	0.1662
	13	1.5751	839.37	0.1281	0.0761	0.0082	0.1594
	14	1.5418	794.07	0.1248	0.0715	0.0078	0.1526
	15	1.5085	748.77	0.1215	0.0668	0.0074	0.1458
	16				0.0641	0.0074	0.1418
		1.4808	718.53	0.1191		CONTRACTOR AND	
	17	1.4532	688.29	0.1166	0.0613	0.0068	0.1377
	18	1.4255	658.05	0.1141	0.0586	0.0065	0.1337
	19	1.3979	627.81	0.1116	0.0558	0.0062	0.1297
	20	1.3702	597.57	0.1091	0.0530	0.0059	0.1257
	21	1.3471	577.16	0.1073	0.0514	0.0057	0.1232
	22	1.3239	556.75	0.1054	0.0497	0.0055	0.1207
	23	1.3008	536.34	0.1036	0.0480	0.0053	0.1183
	24	1.2777	515.93	0.1017	0.0463	0.0051	0.1158
	25	1.2545	495.52	0.0998	0.0446	0.0049	0.1134
	26	1.2352	481.77	0.0985	0.0435	0.0048	0.1119
	27	1.2158	468.03	0.0971	0.0425	0.0047	0.1104
	28	1.1964	454.29	0.0958	0.0414	0.0047	0.1089
	29	1.1771	440.55	0.0944	0.0404	0.0044	0.1074
	30	1.1577	426.80	0.0931	0.0393	0.0043	0.1059
	31	1.1417	417.79	0.0921	0.0387	0.0042	0.1050
	32	1.1256	408.77	0.0912	0.0380	0.0041	0.104
	33	1.1095	399.75	0.0902	0.0373	0.0040	0.1032
	34	1.0935	390.74	0.0893	0.0367	0.0039	0.1023
	35	1.0774	381.72	0.0883	0.0360	0.0038	0.1015
	36	1.0645	376.27	0.0878	0.0356	0.0038	0.1010
	37	1.0515	370.81	0.0872	0.0352	0.0037	0.1006
	38	1.0385	365.36	0.0866	0.0346	0.0037	0.100
	39	1.0255	359.91	0.0860	0.0344	0.0036	0.0997
	40	1.0126	354.45	0.0854	0.0340	0.0036	0.0993
	41	1.0027	351.89	0.0851	0.0337	0.0035	0.0992
	42	0.9928	349.32	0.0848	0.0335	0.0035	0.099
	43	0.9829	346.76	0.0845	0.0333	0.0035	0.0990
	44	0.9730	344.20	0.0843	0.0331	0.0035	0.0990
	45	0.9631	341.63	0.0840	0.0328	0.0034	0.0989
	46	0.9567	341.64	0.0840	0.0327	0.0034	0.0992
		manufacture of the					
	47	0.9502	341.64	0.0840	0.0327	0.0034	0.099
	48	0.9437	341.65	0.0840	0.0326	0.0034	0.099
	49	0.9373	341.65	0.0840	0.0325	0.0034	0.1000
	50	0.9308	341.66	0.0841	0.0324	0.0034	0.1003
	51	0.9286	344.21	0.0844	0.0324	0.0035	0.1010
	52	0.9263	346.77	0.0847	0.0325	0.0035	0.1016
	53	0.9241	349.32	0.0850	0.0325	0.0035	0.1023
	54	0.9218	351.88	0.0853	0.0326	0.0035	0.1030
	55	0.9196	354.44	0.0857	0.0326	0.0036	0.1036
	56	0.9231	359.81	0.0863	0.0328	0.0036	0.1048
	57	0.9266	365.18	0.0870	0.0330	0.0037	0.1060
	58	0.9302	370.55	0.0876	0.0332	0.0037	0.1072
	59	0.9337	375.92	0.0883	0.0334	0.0038	0.1084
	60	0.9372	381.29	0.0889	0.0335	0.0038	0.109
	61	0.9496	390.09	0.0899	0.0339	0.0039	0.111
	62	0.9619	398.89	0.0910	0.0342	0.0040	0.113
	63	0.9742	407.68	0.0920	0.0346	0.0041	0.115
	64	0.9865	416.48	0.0930	0.0349	0.0042	0.1172
	65	0.9988	425.28	0.0940	0.0353	0.0042	0.119
	66	1.0285	431.39	0.0949	0.0355	0.0043	0.1219
	67	1.0582	437.51	0.0957	0.0358	0.0044	0.124
	68	1.0879	443.62	0.0966	0.0361	0.0044	0.127
	69	1.1176	449.74	0.0975	0.0363	0.0045	0.130
	70	1.1473	455.85	0.0983	0.0366	0.0045	0.132
	71	1.2045	456.12	0.0988	0.0366	0.0045	0.136
	72	1.2617	456.39	0.0992	0.0366	0.0045	0.141
	73	1.3189	456.66	0.0997	0.0367	0.0045	0.145
	74	1.3761	456.92	0.1002	0.0367	0.0045	0.149
	75	1.4333	457.19	0.1002	0.0367	0.0046	0.153
	76	1.5363	457.55	0.1000	0.0368	0.0046	0.159
	77	1.6393	457.92	0.1012	0.0368	0.0046	0.166
	78	1.7423	458.28	0.1019	0.0369	0.0046	0.173
	79	1.8452	458.64	0.1023	0.0369	0.0046	0.179
		1.0402	70.07	0.1001	0.0003	0.0040	0.113

## Emissions Tables

Truck	0	11.9473	30.38	1.3921	0.0019	0.0000	1.0193	Truck	0	2.6933	28.33	0.8788	0.0015	0.0000	0.2027
	5	22.5401	2812.55	26.1291	1.8338	0.0273	7.6294		5	5.2205	2931.21	5.2336	0.1930	0.0281	1.6681
	6	21.8297	2753.56	25.2987	1.7745	0.0267	7.2931		6	5.0216	2869.86	5.1121	0.1899	0.0275	1.5942
1117 4	7	21.1194	2694.58	24.4683	1.7151	0.0261	6.9568		7	4.8228	2808.52	4.9906	0.1868	0.0269	1.5204
	8	20.4090	2635.59	23.6380	1.6557	0.0256	6.6206		8	4.6239	2747.17	4.8691	0.1837	0.0263	1.4465
	9	19.6986	2576.61	22.8076	1.5964	0.0250	6.2843		9	4.4251	2685.83	4.7476	0.1806	0.0257	1.3727
	10	18.9882	2517.62	21.9772	1.5370	0.0244	5.9480		10	4.2263	2624.48	4.6261	0.1775	0.0251	1.298
	11	17.9389	2424.07	20.7639	1.4411	0.0235	5.4372		11	3.9378	2526.50	4.4341	0.1725	0.0242	1.189
	12	16.8896	2330.52	19.5506	1.3451	0.0226	4.9264		12	3.6493	2428.51	4.2421	0.1674	0.0233	1.079
	13	15.8403	2236.96	18.3373	1.2492	0.0217	4.4156		13	3.3608	2330.52	4.0501	0.1624	0.0223	0.969
	14	14.7910	2143.41	17.1240	1.1532	0.0207	3.9048		14	3.0723	2232.53	3.8580	0.1574	0.0214	0.859
	15	13.7417	2049.86	15.9107	1.0573	0.0198	3.3940		15	2.7838	2134.54	3.6660	0.1523	0.0205	0.750
	16	13.0390	1980.50	15.2844	0.9910	0.0191	3.0871		16	2.6152	2061.31	3.5406	0.1486	0.0198	0.690
	17	12.3362	1911.15	14.6582	0.9247	0.0185	2.7803		17	2.4467	1988.07	3.4152	0.1449	0.0191	0.630
	18	11.6335	1841.80	14.0320	0.8585	0.0178	2.4734		18	2.2781	1914.83	3.2897	0.1411	0.0184	0.570
	19	10.9308	1772.44	13.4057	0.7922	0.0172	2.1665		19	2.1096	1841.59	3.1643	0.1374	0.0177	0.510
	20	10.2280	1703.09	12.7795	0.7259	0.0165	1.8597		20	1.9410	1768.36	3.0388	0.1337	0.0170	0.449
	21	9.8116	1667.41	12.6268	0.6982	0.0162	1.7695		21	1.8755	1730.96	2.9808	0.1315	0.0166	0.435
1-11-11-	22	9.3951	1631.72	12.4741	0.6705	0.0158	1.6793		22	1.8099	1693.56	2.9227	0.1292	0.0163	0.421
	23	8.9786	1596.04	12.3214	0.6428	0.0155	1.5891		23	1.7443	1656.17	2.8647	0.1270	0.0159	0.4079
	24	8.5622	1560.35	12.1687	0.6151	0.0152	1.4989		24	1.6788	1618.77	2.8066	0.1248	0.0156	0.393
	25	8.1457	1524.67	12.0160	0.5874	0.0148	1.4086		25	1.6132	1581.37	2.7486	0.1226	0.0152	0.3799
	26	7.8695	1504.48	11.9390	0.5708	0.0146	1.3627		26	1.5789	1560.26	2.7118	0.1213	0.0150	0.372
- 97	27	7.5933	1484.29	11.8621	0.5542	0.0144	1.3167		27	1.5445	1539.14	2.6750	0.1201	0.0148	0.365
	28	7.3172	1464.09	11.7851	0.5377	0.0142	1.2707		28	1.5102	1518.03	2.6382	0.1188	0.0146	0.358
	29	7.0410	1443.90	11.7082	0.5211	0.0140	1.2247		29	1.4758	1496.92	2.6014	0.1175	0.0144	0.351
	30	6.7648	1423.71	11.6312	0.5045	0.0138	1.1787		30	1.4415	1475.80	2.5646	0.1162	0.0142	0.344
	31	6.5648	1408.67	11.5829	0.4924	0.0136	1.1449		31	1.4197	1459.94	2.5359	0.1156	0.0140	0.3384
	32	6.3648	1393.63	11.5345	0.4802	0.0135	1.1112		32	1.3979	1444.09	2.5072	0.1150	0.0139	0.332
	33	6.1648	1378.58	11.4862	0.4681	0.0133	1.0774		33	1.3761	1428.23	2.4785	0.1145	0.0137	0.326
	34	5.9648	1363.54	11.4378	0.4560	0.0132	1.0436		34	1.3543	1412.38	2.4498	0.1139	0.0136	0.320
	35	5.7648	1348.50	11.3895	0.4438	0.0130	1.0098		35	1.3326	1396.52	2.4211	0.1133	0.0134	0.3150
	36	5.6235	1337.56	11.3686	0.4360	0.0130	0.9866		36	1.3202	1384.95	2.4003	0.1132	0.0133	0.310
	37	5.4823	1326.62	11.3477	0.4281	0.0129	0.9634		37	1.3078	1373.39	2.3795	0.1132	0.0132	0.305
	38	5.3410	1315.68	11.3269	0.4202	0.0128	0.9402		38	1.2954	1361.83	2.3588	0.1132	0.0131	0.3009
	39	5.1997	1304.75	11.3060	0.4124	0.0128	0.9170		39	1.2830	1350.26	2.3380	0.1131	0.0130	0.2962
	40	5.0584	1293.81	11.2852	0.4045	0.0127	0.8938		40	1.2706	1338.70	2.3172	0.1131	0.0129	0.291
	41 42	4.9665 4.8746	1286.55	11.2922 11.2993	0.4009	0.0126	0.8801		41	1.2659	1330.95	2.3044	0.1136	0.0128	0.287
		the second secon	1279.29			0.0125	0.8664		42	1.2611	1323.20	2.2915	0.1141	0.0127	0.284
	43	4.7827	1272.03	11.3064	0.3936	0.0124	0.8528		43	1.2563	1315.45	2.2787	0.1146	0.0127	0.280
	44	4.6908 4.5989	1264.77 1257.51	11.3135	0.3900	0.0123	0.8391		44 45	1.2515	1307.70	2.2659	0.1151	0.0126	0.276
100	46	4.5523	1253.73	11.3205 11.3572	0.3869	0.0122	0.8254		46	1.2467 1.2488	1299.96 1295.81	2.2531	0.1156 0.1166	0.0125 0.0125	0.272
	47	4.5057	1249.96	11.3938	0.3874	0.0122	0.8161		47	1.2508		2.2439	0.1176	0.0123	
	48	4.4591	1249.90	11.4304	0.3879	0.0121	0.8114		48	1.2529	1291.67 1287.52	2.2393	0.1176	0.0124	0.267
	49	4.4125	1242.42	11.4671	0.3884	0.0121	0.8068		49	1.2550	1283.38	2.2348	0.1196	0.0123	0.2620
	50	4.3659	1238.64	11.5037	0.3889	0.0120	0.8021		50	1.2570	1279.24	2.2302	0.1206	0.0123	0.2592
	51	4.3647	1238.29	11.5735	0.3935	0.0120	0.8060		51	1.2658	1278.69	2.2344	0.1200	0.0123	0.257
	52	4.3636	1237.93	11.6434	0.3980	0.0120	0.8099		52	1.2746	1278.15	2.2387	0.1235	0.0123	0.255
- 3	53	4.3624	1237.58	11.7132	0.4026	0.0121	0.8137		53	1.2833	1277.61	2.2429	0.1250	0.0123	0.253
	54	4.3612	1237.22	11.7830	0.4072	0.0121	0.8176		54	1.2921	1277.07	2.2472	0.1265	0.0123	0.2519
	55	4.3600	1236.87	11.8528	0.4118	0.0121	0.8215		55	1.3009	1276.53	2.2514	0.1279	0.0123	0.250
	56	4.4085	1240.28	11.9617	0.4204	0.0121	0.8339		56	1.3169	1279.82	2.2654	0.1279	0.0123	0.249
	57	4.4570	1243.70	12.0705	0.4290	0.0121	0.8462		57	1.3329	1283.12	2.2794	0.1233	0.0123	0.248
	58	4.5055	1247.12	12.1793	0.4376	0.0121	0.8585		58	1.3489	1286.41	2.2934	0.1338	0.0124	0.2472
	59	4.5540	1250.53	12.2882	0.4462	0.0121	0.8709		59	1.3649	1289.70	2.3074	0.1357	0.0124	0.2462
	60	4.6025	1253.95	12.3970	0.4548	0.0121	0.8832		60	1.3809	1292.99	2.3214	0.1377	0.0124	0.245
	61	4.7103	1261.59	12.5545	0.4675	0.0122	0.9039		61	1.4056	1300.78	2.3466	0.1401	0.0125	0.2452
	62	4.8181	1269.23	12.7120	0.4801	0.0122	0.9245		62	1.4303	1308.56	2.3719	0.1425	0.0126	0.245
	63	4.9258	1276.87	12.8695	0.4928	0.0123	0.9451		63	1.4551	1316.34	2.3972	0.1449	0.0127	0.2450
	64	5.0336	1284.51	13.0270	0.5054	0.0124	0.9658		64	1.4798	1324.12	2.4225	0.1472	0.0128	0.2450
	65	5.1414	1292.15	13.1845	0.5181	0.0125	0.9864		65	1.5045	1331.90	2.4477	0.1496	0.0129	0.2449
	66	5.3265	1305.25	13.4060	0.5347	0.0126	1.0154		66	1.5406	1345.12	2.4868	0.1525	0.0130	0.245
	67	5.5117	1318.34	13.6275	0.5514	0.0127	1.0445		67	1.5767	1358.34	2.5258	0.1553	0.0131	0.246
	68	5.6968	1331.44	13.8490	0.5681	0.0129	1.0735		68	1.6128	1371.56	2.5648	0.1581	0.0133	0.247
	69	5.8819	1344.54	14.0704	0.5848	0.0130	1.1025		69	1.6489	1384.77	2.6039	0.1609	0.0134	0.2482
	70	6.0670	1357.63	14.2919	0.6015	0.0132	1.1315		70	1.6850	1397.99	2.6429	0.1637	0.0135	0.2490
	71	6.3619	1377.97	14.6022	0.6222	0.0134	1.1690		71	1.7373	1418.60	2.6996	0.1670	0.0137	0.2506
	72	6.6568	1398.30	14.9124	0.6429	0.0136	1.2065		72	1.7897	1439.21	2.7564	0.1703	0.0139	0.252
	73	6.9517	1418.63	15.2226	0.6636	0.0138	1.2440		73	1.8421	1459.81	2.8131	0.1736	0.0141	0.253
	74	7.2466	1438.97	15.5328	0.6843	0.0140	1.2815		74	1.8945	1480.42	2.8698	0.1770	0.0142	0.255
	75	7.5415	1459.30	15.8430	0.7050	0.0142	1.3190		75	1.9468	1501.03	2.9265	0.1803	0.0144	0.257
	76	8.0049	1490.48	16.2826	0.7298	0.0145	1.3652		76	2.0240	1532.35	3.0074	0.1840	0.0147	0.259
	77	8.4683	1521.66	16.7221	0.7546	0.0148	1.4115		77	2.1012	1563.67	3.0883	0.1878	0.0150	0.262
	78	8.9317	1552.83	17.1616	0.7794	0.0151	1.4578		78	2.1784	1594.99	3.1692	0.1916	0.0153	0.265
	79	9.3951	1584.01	17.6011	0.8042	0.0154	1.5040		79	2.2556	1626.31	3.2502	0.1953	0.0157	0.2676
	80	9.8585	1615.19	18.0406	0.8290	0.0157	1.5503		80	2.3327	1657.62	3.3311	0.1991	0.0160	0.2702

## Emissions Tables

		_	_						_
	Bus	0	14.6727	28.69	1.5687	0.0000	0.0000	1.1095	
		5	28.3191	2218.86	20.8161	0.7388	0.0210	2.9203	
		6	27.2371	2191.74	20.3513	0.7197	0.0210	2.8212	
		7	26.1550	2164.62	19.8865	0.7005	0.0210	2.7220	
		8	25.0729	2137.50	19.4217	0.6813	0.0210	2.6229	
		9	23.9908	2110.37	18.9569	0.6622	0.0210	2.5238	
		10	22.9088	2083.25	18.4921	0.6430	0.0210	2.4246	
		11	21.4549	2046.78	17.8182	0.6135	0.0206	2.2853	
		12	20.0011	2010.30		0.5841	0.0201	2.1459	
			100000000000000000000000000000000000000		17.1444				
		13	18.5473	1973.83	16.4705	0.5546	0.0196	2.0066	
		14	17.0934	1937.35	15.7967	0.5251	0.0192	1.8672	
		15	15.6396	1900.88	15.1229	0.4957	0.0187	1.7279	
1 000		16	14.7703	1879.37	14.6884	0.4760	0.0187	1.6404	
7 - 7									
		17	13.9010	1857.86	14.2540	0.4564	0.0187	1.5530	
		18	13.0317	1836.35	13.8196	0.4368	0.0187	1.4655	
		19	12.1624	1814.84	13.3852	0.4171	0.0187	1.3781	
		20	11.2930	1793.33	12.9508	0.3975	0.0187	1.2906	
		21	10.7586	1779.77	12.6781	0.3839	0.0182	1.2336	
		22	10.2241	1766.20	12.4055	0.3704	0.0178	1.1765	
		23	9.6896	1752.64	12.1329	0.3568	0.0173	1.1195	
		24	9,1551	1739.08	11.8603	0.3432	0.0168	1.0624	
		25	8.6206	1725.52	11.5876	0.3297	0.0164	1.0054	
	711								
		26	8.2867	1717.10	11.4324	0.3194	0.0164	0.9675	
		27	7.9528	1708.69	11.2771	0.3091	0.0164	0.9296	
100		28	7.6189	1700.27	11.1219	0.2988	0.0164	0.8918	
		29	7.2851	1691.85	10.9666	0.2885	0.0164	0.8539	
		30	6.9512	1683.44	10.8114	0.2782	0.0164	0.8160	
		31	6.7445	1678.29	10.7497	0.2708	0.0164	0.7903	
		32	6.5378	1673.15	10.6879	0.2633	0.0164	0.7646	
		33	6.3311	1668.00	10.6262	0.2558	0.0164	0.7388	
		34	6.1244	1662.86	10.5645	0.2483	0.0164	0.7131	
		35	5.9177	1657.72	10.5028	0.2408	0.0164	0.6874	
		16.76							
		36	5.7971	1654.91	10.5247	0.2357	0.0164	0.6706	
		37	5.6765	1652.11	10.5467	0.2305	0.0164	0.6537	
		38	5.5558	1649.30	10.5687	0.2254	0.0164	0.6369	
		39	5.4352	1646.49	10.5907	0.2202	0.0164	0.6201	
		10000							
		40	5.3145	1643.69	10.6127	0.2151	0.0164	0.6032	
		41	5.2589	1642.29	10.7197	0.2114	0.0164	0.5920	
		42	5.2032	1640.88	10.8268	0.2076	0.0164	0.5808	
		43	5.1476	1639.48	10.9339	0.2039	0.0164	0.5696	
		44	5.0919	1638.08	11.0410	0.2001	0.0164	0.5583	
		100000							
		45	5.0363	1636.67	11.1481	0.1964	0.0164	0.5471	
		46	5.0339	1637.14	11.3552	0.1945	0.0164	0.5396	
		47	5.0316	1637.61	11.5624	0.1927	0.0164	0.5322	
		48	5.0293	1638.08	11.7696	0.1908	0.0164	0.5247	
		49	5.0269	1638.54	11.9767	0.1889	0.0164	0.5172	
	7 - 4 - 7 -	50	5.0246	1639.01	12.1839	0.1870	0.0164	0.5097	
		51	5.0770	1639.95	12.5201	0.1856	0.0164	0.5060	
		52	5.1293	1640.88	12.8563	0.1842	0.0164	0.5022	
		53	5.1817	1641.82	13.1925	0.1828	0.0164	0.4985	
		54							
			5.2341	1642.75	13.5287	0.1814	0.0164	0.4947	
		55	5.2865	1643.69	13.8650	0.1800	0.0164	0.4910	
9		56	5.4020	1646.96	14.3831	0.1796	0.0164	0.4896	
		57	5.5175	1650.23	14.9012	0.1791	0.0164	0.4882	
		58	5,6330	1653.51	15.4193	0.1786	0.0164	0.4868	
	57-11-8	59	5.7485			0.1782	0.0164	0.4854	
				1656.78	15.9375				
		60	5.8640	1660.05	16.4556	0.1777	0.0164	0.4840	
		61	6.0646	1666.13	17.2487	0.1777	0.0164	0.4859	
		62	6.2652	1672.21	18.0418	0.1777	0.0164	0.4877	
		63	6.4658	1678.29	18.8348	0.1777	0.0164	0.4896	
		64	6.6664	1684.37	19.6279	0.1777	0.0164	0.4915	
		65	6.8670	1690.45	20.4210	0.1777	0.0164	0.4933	
		66	7.1920	1699.33	21.6452	0.1796	0.0164	0.4980	
		67	7.5170	1708.22	22.8695	0.1814	0.0164	0.5027	
		68	7.8420	1717.10	24.0937	0.1833	0.0164	0.5074	
		69							
			8.1670	1725.99	25.3179	0.1852	0.0164	0.5120	
		70	8.4920	1734.87	26.5422	0.1870	0.0164	0.5167	
		71	9.0134	1749.37	28.4753	0.1894	0.0168	0.5247	
		72	9.5348	1763.87	30.4085	0.1917	0.0173	0.5326	
		73	10.0562	1778.36	32.3416	0.1941	0.0178	0.5406	
		74	10.5776	1792.86	34.2747	0.1964	0.0182	0.5485	
		75	11.0990	1807.36	36.2079	0.1987	0.0187	0.5565	
		76	11.9477	1831.67	39.3526	0.2025	0.0187	0.5686	
		77	12.7964	1855.99	42.4974	0.2062	0.0187	0.5808	
				,000.00					
			12 6450	1900 20					
		78	13.6452	1880.30	45.6421	0.2100	0.0187	0.5929	
			13.6452 14.4939 15.3426	1880.30 1904.62 1928.94	45.6421 48.7869 51.9317	0.2100 0.2137 0.2174	0.0187 0.0187 0.0187	0.5929 0.6051 0.6173	

	Bus	0	5.3553	8.37	0.7447	0.0000	0.0000	0.3598	
		5	13.1281	2053.23	12.3032	0.5882	0.0197	1.5475	
		6						Control of the Control	
			12.6328	2031.71	12.0271	0.5735	0.0197	1.4984	
		7	12.1375	2010.19	11.7509	0.5588	0.0197	1.4493	
		8	11.6422	1988.67	11.4747	0.5441	0.0197	1.4001	
- 4		9	11.1469	1967.15	11.1986	0.5294	0.0197	1.3510	
		10	10.6517	1945.63	10.9224	0.5147	0.0197	1.3019	
					10.5229		0.0190	1 (200 (200))	
		11	9.9839	1916.94		0.4921		1.2323	
	a import	12	9.3161	1888.25	10.1234	0.4695	0.0183	1.1627	
		13	8.6483	1859.56	9.7239	0.4469	0.0176	1.0931	
		14	7.9805	1830.87	9.3243	0.4243	0.0169	1.0236	
		15	7.3127	1802.18	8.9248	0.4017	0.0161	0.9540	
		100							
		16	6.9114	1785.32	8.6669	0.3863	0.0161	0.9092	
		17	6.5101	1768.46	8.4091	0.3708	0.0161	0.8643	
		18	6.1087	1751.61	8.1512	0.3554	0.0161	0.8195	
		19	5.7074	1734.75	7.8934	0.3400	0.0161	0.7747	
		20	5.3061	1717.89	7.6355	0.3246	0.0161	0.7298	
		21	5.0583	1707.49	7.4741	0.3135	0.0161	0.7001	
							0.0161	0.0000000000000000000000000000000000000	
		22	4.8105	1697.09	7.3127	0.3023		0.6703	
		23	4.5626	1686.69	7.1513	0.2912	0.0161	0.6405	
		24	4.3148	1676.29	6.9899	0.2801	0.0161	0.6108	
		25	4.0670	1665.89	6.8285	0.2690	0.0161	0.5810	
		26	3.9117	1658.72	6.7360	0.2611	0.0158	0.5609	
		27	3.7564	1651.55	6.6435	0.2532	0.0154	0.5408	
		28	3.6011	1644.37	6.5510	0.2453	0.0151	0.5207	
	14, 14,	29	3.4458	1637.20	6.4584	0.2374	0.0147	0.5007	
	11 000	30	3.2905	1630.03	6.3659	0.2295	0.0143	0.4806	
		31	3.1930	1626.44	6.3290	0.2238	0.0143	0.4670	
		32	3.0954	1622.85	6.2920	0.2181	0.0143	0.4533	
		1000	100000000000000000000000000000000000000			100000000000000000000000000000000000000			
		33	2.9979	1619.27	6.2551	0.2123	0.0143	0.4397	
		34	2.9003	1615.68	6.2181	0.2066	0.0143	0.4261	
	MET A	35	2.8028	1612.10	6.1812	0.2008	0.0143	0.4124	
		36	2.7450	1609.58	6.1934	0.1965	0.0143	0.4028	
		37	2.6873	1607.07	6.2056	0.1922	0.0143	0.3931	
	- M	38	200000000000000000000000000000000000000	1604.56		200000000000000000000000000000000000000	0.0143	0.3834	
			2.6296		6.2178	0.1879			
100		39	2.5718	1602.05	6.2300	0.1836	0.0143	0.3737	
		40	2.5141	1599.54	6.2422	0.1793	0.0143	0.3640	
		41	2.4850	1598.11	6.3046	0.1765	0.0143	0.3576	
		42	2.4560	1596.67	6.3670	0.1736	0.0143	0.3511	
		43	2.4269	1595.24	6.4294	0.1707	0.0143	0.3447	
		44	2.3979	1593.80	6.4918	0.1678	0.0143	0.3382	
			2.3688						
100		45		1592.37	6.5542	0.1650	0.0143	0.3317	
		46	2.3649	1593.09	6.6754	0.1632	0.0143	0.3278	
		47	2.3609	1593.80	6.7966	0.1614	0.0143	0.3239	
200		48	2.3570	1594.52	6.9178	0.1596	0.0143	0.3199	
	100	49	2.3530	1595.24	7.0391	0.1578	0.0143	0.3160	
1 15		50	2.3491	1595.96	7.1603	0.1560	0.0143	0.3120	
3	10.00	The state of the s							
1000		51	2.3685	1597.03	7.3579	0.1549	0.0143	0.3099	
		52	2.3878	1598.11	7.5555	0.1539	0.0143	0.3077	
95.00		53	2.4072	1599.18	7.7531	0.1528	0.0143	0.3056	
	-	54	2.4266	1600.26	7.9507	0.1517	0.0143	0.3034	
1		55	2.4459	1601.34	8.1483	0.1506	0.0143	0.3013	
313		56	2.4922	1603.85	8.4535	0.1503	0.0143	0.3005	
- 10 mg		57		1606.36			0.0143	0.2998	
		1000	2.5385		8.7588	0.1499		100000000000000000000000000000000000000	
1 3 3		58	2.5847	1608.87	9.0640	0.1496	0.0143	0.2991	
		59	2.6310	1611.38	9.3692	0.1492	0.0143	0.2984	
		60	2.6773	1613.89	9.6744	0.1488	0.0143	0.2977	
	Karly I.	61	2.7594	1618.55	10.1424	0.1492	0.0147	0.2987	
	78,016.7	62	2.8415	1623.21	10.6104	0.1496	0.0151	0.2998	
		63	2.9236	1627.88	11.0784	0.1499	0.0154	0.3009	
( )			3.0058			0.1503		0.3020	
		64		1632.54	11.5465	100000000000000000000000000000000000000	0.0158		
		65	3.0879	1637.20	12.0145	0.1506	0.0161	0.3031	
		66	3.2217	1644.37	12.7397	0.1513	0.0161	0.3056	
	HE P	67	3.3555	1651.55	13.4649	0.1521	0.0161	0.3081	
		68	3.4892	1658.72	14.1900	0.1528	0.0161	0.3106	
		69	3.6230	1665.89	14.9152	0.1535	0.0161	0.3131	
		70				100000000000000000000000000000000000000		0.3156	
			3.7568	1673.06	15.6404	0.1542	0.0161		
	100	71	3.9702	1684.54	16.7880	0.1560	0.0161	0.3203	
		72	4.1836	1696.02	17.9357	0.1578	0.0161	0.3249	
		73	4.3969	1707.49	19.0833	0.1596	0.0161	0.3296	
		74	4.6103	1718.97	20.2310	0.1614	0.0161	0.3343	
-		75	4.8237	1730.45	21.3786	0.1632	0.0161	0.3389	
			5.1691	1749.10	23.2518	0.1657	0.0161	0.3461	
		76							
		77	5.5145	1767.75	25.1250	0.1682	0.0161	0.3533	
115		78	5.8599	1786.40	26.9982	0.1707	0.0161	0.3604	
		79	6.2052	1805.04	28.8714	0.1732	0.0161	0.3676	
		80	6.5506	1823.69	30.7446	0.1757	0.0161	0.3748	
1000									2
								701111111111111111111111111111111111111	

Source: California Air Resources Board, EMFAC 2007 V2.3, Burden Area Planning

Notes: 1) Zero mph corresponds to starts, 2) Other emissions factors include idling emissions and exclude diurnal and evaporative emissions, 3) Five mph is best estimate for idling

## HEALTH COST OF TRANSPORTATION EMISSIONS (\$/ton)

Area	Proj Loc	co	CO <sub>2</sub> e	NOx	PM <sub>10</sub>	SOx	VOC
LA/South Coast	1	\$135	\$37	\$55,700	\$456,500	\$171,500	\$3,465
CA Urban Area	2	\$70	\$37	\$16,300	\$131,800	\$65,800	\$1,140
CA Rural Area	3	\$65	\$37	\$12,100	\$94,000	\$47,500	\$895

CO<sub>2</sub>e Uprater 2% increase in value per year

Sources: McCubbin and Delucchi, 1996 for emissions other than CO2e
United Kingdom Department for Environment Food and Rural Affairs (DEFRA) for CO2e

## PASSENGER TRAIN EMISSIONS FACTORS

(g/train-mile)

Mode	Year	co	CO2	NOx	PM <sub>10</sub>	SOX	VOC
Passenger Train	2002	45.67		583.58	62.02		19.73
	2022	45.67		250.11	31.01		19.73

#### LIGHT RAIL EMISSIONS FACTORS

(g/veh-mile)

Mode	Year	СО	CO2	NOx	PM <sub>10</sub>	SOx	VOC
Light Rail	2002	0.14		1.13	0.17		0.06
	2022	0.14		1.14	0.17		0.06

Source: California Air Resources Board

## Pavement Adjustments (used only for pavement projects)

#### PAVEMENT DETERIORATION (IRI in inches/mile)

	Yea	r 20, By Loa	ding
Year 0	Light	Medium	Heavy
0	125	150	350
25	150	200	500
50	175	250	675
75	200	300	750
100	275	400	750
125	325	475	750
150	400	575	750
175	500	700	750
200	575	750	750
225	650	750	750
250	750	750	750
275	750	750	750
300	750	750	750
325	750	750	750
350	750	750	750
375	750	750	750
400	750	750	750
425	750	750	750
450	750	750	750

## VEHICLE OPERATING SPEED (percent adjustment)

IRI	Auto	Truck
0	1.00	1.02
25	1.00	1.02
50	1.00	1.02
75	1.00	1.02
100	1.00	1.02
125	1.00	1.02
150	1.00	1.01
175	1.00	1.00
200	1.00	0.98
225	1.00	0.95
250	1.00	0.92
275	0.99	0.89
300	0.98	0.86
325	0.97	0.83
350	0.96	0.81
375	0.95	0.78
400	0.94	0.76
425	0.93	0.73
450	0.92	0.71

Source: Paterson, 1987

Source: Botterill, 1996 and 1997

## FUEL CONSUMPTION (percent adjustment)

IRI	Auto	Truck
0	0.97	0.96
25	0.98	0.97
50	0.98	0.97
75	0.98	0.98
100	0.98	0.90
125	0.99	0.99
150	1.00	0.99
175	1.00	1.00
200	1.01	1.01
225	1.01	1.02
250	1.02	1.03
275	1.03	1.04
300	1.03	1.05
325	1.04	1.06
350	1.05	1.07
375	1.06	1.08
400	1.07	1.10
425	1.08	1.11
450	1.09	1.13

NON-FUEL COSTS (percent adjustment)

IRI	Auto	Truck
0	1.00	1.00
25	1.00	1.00
50	1.00	1.00
75	1.00	1.00
100	1.00	1.00
125	1.00	1.00
150	1.02	1.02
175	1.03	1.04
200	1.05	1.06
225	1.07	1.08
250	1.09	1.10
275	1.11	1.12
300	1.12	1.14
325	1.14	1.16
350	1.16	1.18
375	1.18	1.20
400	1.19	1.22
425	1.21	1.24
450	1.23	1.26

Source: Texas Transportation Institute, 1994

Source: ARRB Research Board TR VOC Model

## **Weaving Adjustments** (used only for freeway connector, HOV connector, and HOV drop ramp projects)

## VEHICLE OPERATING SPEED (percent adjustment)

Percent	Freeway	HOV
Weaving	Conn	Project
0.000	1.00	1.00
0.002	0.98	0.99
0.004	0.96	0.98
0.006	0.95	0.96
0.008	0.93	0.95
0.010	0.91	0.94
0.012	0.89	0.93
0.014	0.87	0.92
0.016	0.85	0.90
0.018	0.84	0.89
0.020	0.79	0.88
0.022	0.75	0.87
0.024	0.71	0.85
0.026	0.66	0.84
0.028	0.62	0.82
0.030	0.58	0.79
0.032	0.54	0.76
0.034	0.50	0.73
0.036	0.48	0.71
0.038	0.47	0.68
0.040	0.47	0.65
0.042	0.47	0.62
0.044	0.47	0.60
0.046	0.46	0.57
0.048	0.46	0.54
0.050	0.46	0.51
0.052	0.46	0.48
0.054	0.45	0.48
0.056	0.45	0.47
0.058	0.45	0.47
0.060	0.45	0.47
0.062	0.45	0.47
0.064	0.45	0.47
0.066	0.45	0.47
0.068	0.45	0.46
0.070	0.45	0.46
0.072	0.45	0.46
0.074	0.45	0.46
0.076	0.45	0.46
0.078	0.45	0.46
0.080	0.45	0.45

Source: Fitzpatrick, Brewer, and Venglar, 2003

TMS Adjustments (used only for ramp metering, ramp metering signal coordination, incident management, traveler information projects, AVL, transit priority, and BRT projects)

## PEAK PERIOD SPEED, VOLUME, AND NON-HIGHWAY BENEFITS (percent adjustment)

TMS Strategy	Without		W	With		Highway Be	nefits	Total
	Speed	Volume	Speed	Volume	TT	VOC	Em	Benefit
AMoth	1.02	0.95	1.02	0.95	-5.05	12.81	1.37	0.74
AMsev	1.53	0.94	1.53	0.94	1.21	1.38	-0.37	1.00
lMoth	0.88	1.18	0.98	0.96	0.51	0.15	0.06	0.74
Msev	1.01	0.97	1.01	0.95	0.30	0.31	0.30	1.00
NoAdj	1.00	1.00	1.00	1.00	0.00	0.00	0.00	1.00
ORoth	0.98	1.03	1.00	1.00	-0.07	-0.03	-0.07	0.00
ORsev	0.95	1.03	1.00	1.00	0.00	0.00	5.67	0.00
RMoth	1.00	1.00	1.03	0.97	-0.07	-0.03	-0.07	1.00
RMsev	1.00	1.00	1.05	0.97	0.00	0.00	5.67	1.00
Tloth	1.00	1.00	1.02	0.97	-0.11	-0.12	-0.35	1.00
Tisev	1.00	1.00	1.01	0.97	-0.39	-0.39	-0.35	1.00

Source: California Department of Transportation TMS Master Plan, 2003 19) Chaudhary and Messer, 2000

## TRANSIT TRAVEL TIME AND AGENCY COST SAVINGS

	Travel	Agency Costs	
TMS Strategy	Time	Capital	O&M
Transit Vehicle Location (AVL)	15%	2%	8%
Transit Vehicle Signal Priority	10%	-	199
Bus Rapid Transit (BRT)	29%	-	

Sources: FHWA ITS Deployment Analysis System (IDAS), California PATH

19 19